JOHNSON COMPUTER (216) 725-4560

PRELIMINARY INFORMATION ON MICROSOFT 8K BASIC FOR KIM-1

Variable names must start with an alphabetic character,eg. A, A1, A(3,7,2), ZULU
String (literal) variable names are followed by a dollar sign,eg. A$, ZULU$, A$(2,3)
Although variable names may consist of more than two characters, only the first two characters uniquely identify the varable,eg. COST is the same as CORE

OPERATORS: -, +, *, /, ↑, *NOT*, *AND*, *OR*, >, <, <>, <=, =, >=

STATEMENTS	FUNCTIONS	STRING FUNCTIONS	COMMANDS
CLEAR	ABS(X)	ASC(X$)	CONT
DATA	ATN(X)	CHR$(I)	LIST
DEF	COS(X)	FRE(X$)	NEW
DIM	EXP(X)	LEFT$(X$)	NULL
END	FRE(X)	LEN(X$)	RUN
FOR	INT(X)	MID$(X$,I,J)	
GOTO	LOG(X)	RIGHT$(X$,I)	
GOSUB	PEEK(X)	STR$(X)	
IF...GOTO	POS(I)	VAL(X$)	
IF...THEN	RND(X)		
INPUT	SGN(X)		
LET	SIN(X)		
NEXT	SPC(I)		
ON...GOTO	SQR(X)		
ON...GOSUB	TAB(I)		
POKE	TAN(X)		
PRINT or ?	USR(1)		
READ			
REM			
RESTORE			
RETURN			
STOP			



0 Erase typed line
SHIFT/O or ← Erase last character
: Seperates statements on same line
CONTROL/C Interrupts execution or listing
CONTROL/O Inhibits output to terminal

Both versions of BASIC use page zero and page one. They start at 2000HEX. Although they are meant to be used with serial terminals, I/O pointer locations are provided. The USER, PEEK, POKE, and WAIT statements are used to link BASIC to machine code programs and the KIM-1 ports. The 6 digit version uses two-letter symbols for error messages. The nine digit version spells out complete error messages. When executions or listings are interrupted by means of the CONTROL/C or an error, BASIC indicates the number of the line it was about to execute or list.

CAT #	PRECISION	LOADS AT	# OF BYTES	MIN. SYSTEM RAM	RANGE	PRICE
KB-6	6 DIGITS	2000HEX	8257	12000	10E-32 to 10E+32	97.50*
KB-9	9 DIGITS	2000HEX	8802	12000	10E-32 to 10E+32	129.00*

*TERMS: PAYMENT WITH ORDER. ADD $4.00 FOR SHIPPING AND HANDLING. OHIO RESIDENTS ADD 4.5% SALES TAX ($4.39 for KB-6 and $5.81 for KB-9)

Microsoft 8K BASIC for the KIM-1 is furnished on cassette with complete documentation, including a 239 page Schaum's Outline Series' Theory and Problems of Programming with BASIC by Byron S. Gottfried, Ph.D., McGraw Hill.

P.O. BOX 523 MEDINA, OHIO 44256

#158

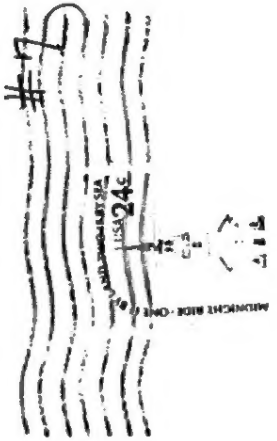

KIM-1 / 6502 USER NOTES
% ERIC C. REHNKE
109 CENTRE AVE
W. NORRITON, PA. 19401
U.S.A.

WILLIAM SCHOFIELD
1701 HAMILTON LANE
TEANECK, NJ 07666

FIRST CLASS

We're beginning to feel like nomads here at the USER NOTES! As you can see from the new return address we've moved again. I'd like to thank you for your patience. I've decided to make this a double issue to help make up for the delay. Hope you notice our new mailing labels. KIM is now doing a little work for the newsletter (it's only fitting, right?). See the "SOFTWARE REVIEW" for more info on this godsend of a software package.

••••••••••••••••••••••••

ATTENTION NEW SUBSCRIBERS!!!!!!!!!

Unfortunately, we are completely sold out of back issues to the newsletter. If you signed up for issues 1 thru 6 you are automatically being set up for issues 7 thru 12 instead. Plans for reprinting have not been finalized. As soon as things are nailed down as far as price and availability are concerned, that info will be passed along in the NOTES.

••••••••••••••••••••••••

57109 CALCULATOR CHIP AVAILABILITY

In the last issue of USER NOTES, the new RPN calc. chip from NATIONAL was mentioned as a idea for a KIM interface. It is advertised as being available from TRI-TEK INC., 6522 N 43rd Ave., Glendale, Az 85301.

The price quoted is $21.92 for the chip and data sheets or $2.00 for the data sheets alone.

••••••••••••••••••••••••

FROM THE FACTORY AVAILABILITY OF MEMORY & MOTHERBOARDS

As you know, the KIM-2 and 3 (4K and 8K RAM cards) have been discontinued. The KIM-4 Motherboard is back on the production list and should be available in December. The KIM-3A, long awaited 8K replacement board, will be delayed indefinately.

However, don't despair!!! It is possible to adapt boards of the S-100 genre to the KIM-4 motherboard. In fact, an application note describing one particular is available from MOS TECHNOLOGY. This app. note describes

However, don't despair!!! It is possible to adapt boards of the S-100 genre to the KIM-4 motherboard. In fact, an application note describing one such adaptation is available from MOS TECHNOLOGY. This app. note describes the mechanical and electrical interface necessary to add a KENT-MOORE ALPHA-VIDEO or their 4K RAM board to the motherboard. These two particular S-100 boards are fully assembled and tested and worked well.

Other S-100 boards could also be adapted, but due to the wide variance of signal requirements necessary for the seemingly "standard" bus structure, all other adaptations are left up to the cleverness of the user.

••••••••••••••••••••••••

KIM-1 USER NOTES are published bi-monthly by Eric C. Rehnke, 189 Centre Avenue, W. Norriton, Pa. 19401. Subscription rates are $5.00 for six issues (U.S. & Canada)..$10.00 for six issues elsewhere.

SOFTWARE REVIEW by the editor

.....Get "HELP" from the COMPUTERIST.....

HELP is a series of application programs which include a mailing list handler, a text editor and printing package, and an information retrieval program, which run on the naked KIM. I used the mailing list package. All I added was another cassette, a couple of TTL-controlled relays, and, of course, a hard-copy terminal (which is needed for all three packages). But, come to think of it, you could probably get away with using one of the low cost impact printers out on the market.

Anyway, the software is really excellent. "HELP" is actually an interpreter-style parameter-passing language which is very well documented and worth every penny of the $15.00 price just to see how it works! It would seem fairly straightforward to adapt this style of mini-interpreter to about any kind of application, such as; data collection, text editing, word processing, game playing, disc-file management, etc.

All sorts of neat things can be done with a little imagination!!

"HELP" REALLY IS IMPRESSIVE!!!!!!!!Seeing KIM doing some useful work for the newsletter is a thrill that just can't be described!!!

I highly recommend that you get more info on the "HELP" mailing list package as well as the rest of the "HELP" packages. Each are $15.00.

For the latest information, write: The COMPUTERIST, PO Box 3
S. Chelmsford, Ma 01824

P.S. Ask for their complete catalog and a copy of their simplified 6502 op-code table.

••••••••••••••••••••••••

6502 vs. Z80

Want to know which chip comes out on top? Then get a copy of KILOBAUD #10. Turn to page 20 and read the article.

Z80 Freaks---eat you hearts out !!!

••••••••••••••••••••••••

...GOOD GUYS REALLY COME THROUGH !!!

In issue #6, I asked for volunteers who would be willing to help out other members of the group by answering questions etc. through the mail. Here are the first of the "good guys" DON'T FORGET TO SEND A SELF-ADDRESSED-STAMPED-ENVELOPE with your correspondence so our friends don't go broke.

Bruce Davidson, Box 1738, Bismark, ND 58501

Mike Jerabek, c/o University of New Hampshire, Physics Dept., Demeritt Hall, Durham, N.H. 03824 (SOFTWARE)

Stan Bowling, 828 N. 31St., Colorado Springs, Colo. 80904 (HARDWARE & SOFTWARE)

Alan Jorgensen, 14007 N. 35th Drive, Phoenix, Arizona 85023

John Fallisgaard, Apt. #604, 1101 S. W. Pkwy., College Station, Tx. 77840 (HARDWARE & SOFTWARE)

Thomas Bray, Apt. #5, 1945 N. Oakland Ave, Milwaukee, Wisc. 53202

If your looking for a bit of fame (not much fortune) then add your name to our growing list of "GOOD GUYS".

Eric.....

••••••••••••••••••••••••

Philip A. Wasson
9513 Hindry Pl.
Los Angeles, CA 90045

TRACE

With this program and about $2.00 worth of hardware you can see displayed on an oscilloscope screen, all the registers in the 6502 and three consecutive memory location starting at the address contained in the registers. They are displayed in the following format:

```
PC XXXX XX XX XX
SP 01XX XX XX XX
   XXXX XX XX XX
NV bdIZC X  Y  A
xxxxxxxxXX XX XX
```

The first line shows the label PC, indicating the program counter, followed by the the address contained in the PC, followed by the contents of three consecutive address, starting at the value of the PC.
The second line shows the stack pointer in the same format.
The third line shows a user definable address and displays it in the same format as above.
The fourth line shows labels for the bits of the P register and for the X, Y, and A registers.
The last line shows the contents of the registers.

The program consists of a software driven graphics generator, a display formatter, and a monitor. It resides in $0200-$03FF.

MEMORY ALLOCATION:

```
03ER-03FE  SEGMENT FORMAT TABLE
03E0-03EA  CHARACTER FORMAT TABLE
03B1-03DF  LINE FORMAT ROUTINE
03A9-03B0  PATCH AREA
0360-03A8  DISPLAY ROUTINES
0303-035F  DSPREG
0270-0302  MONITOR
022B-026F  HEADING TABLE
021B-022A  EXIT ROUTINE
020D-021A  PATCH AREA
0200-020C  INITIALIZATION OF NMI VECTOR
```

Here are the locations of several useful subroutines:

0303 DSPREG - Displays all registers.
0360 OUTBYT - Displays a byte in A.
036B OUTCHR - Displays a symbol if bit 7 of the accumulator is off. Symbols displayed are: 0,1,2,3,4,5,6,7,8,9,0, A,b,C,d,E,F,o,i,P,H in order of the numeric value of the five low order bits of the accumulator.
If bit 7 is on, a vector is drawn in one of fifteen direction, depending on the value of the low order bits. Bit 0 is used for beam blanking. Bits 1 and 2 along with bits 3 and 4 indicate the new relative vertical and horizontal position, respectively.
Bits 5 and 6 are vertical and horizontal reset, respectively.
0374 OTSEGS - Displays a symbol in the following 8 segment display format, with the bits in the accumulator indicating the corresponding segments to be displayed.



038B NEWLN - Returns beam to left margin and down one lin
038F NEWPG - Returns beam to top left margin.

$1701 MUST BE SET TO $FF BEFORE CALLING THESE ROUTINES!

CONSTRUCTION AND USE

Construction layout of the oscilloscope driver circuitry is not critical, but leads should be kept as short as possible. It is important that the power supply be well regulated for a stable display. A 309 or 7805 type regulator is adequate.

Some users may want to use a CMOS 4555 instead of the TTL logic.

If your oscilloscope does not have a Z axis input, the following circuit is suggested. This circuit deflects the beam off the screen during the blanking period.

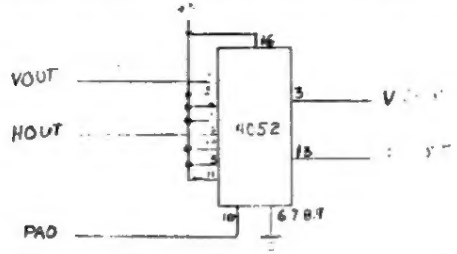

To use the program, connect A-15 to E-6 on the KIM connectors and begin execution at $0200. This sets the NMI vector to $0270. Now, when you press the ST key, you will be in the TRACE monitor. This monitor is just like the KIM except it is always in single step mode (even though the SST switch is off!) and when AD is pressed, it is put in address mode and the address is decremented by one. To return to the KIM, press RS.

Set $ED and $EF to the address you want to monitor. This address and it's contents will then be displayed continuously on the third line of the display.

Set your oscilloscope to x-y input mode and the horizontal and vertical attenuators to about .2V/cm DC. Connect the x, Y, and Z inputs to the driver circuit. Adjust the beam intensity for optimum character definition.

You will notice that the KIM display is dimmer than usual and there is some flicker of the displays, about 16 frames per second. Also the display on the scope may be slanted. To correct this, adjust the 50K trim pots for horizontal lines and vertical margins.

If the scope display appears to be written in hieroglyphics, the beam blanking may need to be inverted. To do this, set $039C to $01.

MODIFICATIONS

The trick to single step operation without using the SST switch is in the interupt exit routine. This routine sets the timer to give an NMI one clock cycle after the RTI is completed. This is part way into the next instruction to be executed. Since all instructions take at least 2 cycles, and the interupt is inhibited until the instruction is complete, only one instruction is executed before the NMI occurs. Thus a single step function is performed.

```
021B AD 03 17 INTEX LDA PBDD
021E 29 7F          AND #$7F
0220 8D 03 17       STA PBDD
0223 A9 28          LDA #$28
0225 8D 0C 17       STA CLKITI
0228 4C C8 1D       JMP GOEXEC
```

more...

TRACE (contd)

In behuping large programs with many loops it is desirable to use conditional tracing. To do this, the user must write a routine to test the desired conditions to be traced. Locations $0267 and $0288 are set to the address of the test routine (low order byte first, of course). If the condition is met, the test routine exits with a JMP $1F88 (INITS). Otherwise, exit with:

```
        PLA
        PLA
        JMP $021B
```

EXAMPLE: Trace if X is less than 2 OR A=0.

```
TEST    LDA $F5    GET VALUE OF X
        CMP #2
        BCC TRUE   SINGLE STEP IF X IS LESS THAN 2
        LDA $F3    GET VALUE OF ACCUMULATOR
        CMP #0
        BEQ TRUE   SST IF A=0
FALSE   PLA
        PLA
        JMP $021B EXECUTE NEXT INSTRUCTION
TRUE    JMP $1E88 RETURN TO TRACE MONITOR
```

IF YOU ARE USING CONDITIONAL TRACING, IT IS NECESSARY TO ENTER THE TRACE MONITOR AT $0289, INSTEAD OF BY THE ST KEY!

EXAMPLE: Press RS, AD, 0, 2, 8, 9, GO
Now set address where tracing is to begin and press GO.
To return to normal tracing, set $0287 to $88 and $0288 to $1F.

The following routine executes a program in "slow motion", about one instruction per second, and displays all the registers on the oscilloscope screen.

```
200 A2 11    SLOMO LDX #$11 ;SPEED CONSTANT
202 8E 0F 02 LP    STX SAVX+1
205 20 03 03       JSR DSPREG
208 20 6A 1F       JSR GETKEY
20B AA             TAX       ;SET FLAGS IN P REG
20C F0 0A          BEQ TOMON
20E A2 00    SAVX  LDX #*-*
210 CA             DEX
211 D0 EF          BNE LP
213 68             PLA
214 68             PLA
215 4C 1B 02       JMP $021B ;TO EXECUTE ONE INSTRUCTION
218 4C 88 1E TOMON JMP $1F88 ;RETURN TO TRACE MONITOR
```

To start SLOMO, set $0267 to $00 and $0288 to $02 with KIM . Enter TRACE monitor by starting execution at $0289. Then set address where tracing is to begin and press GO.
To return to TRACE monitor, press 0 key.
To resume SLOMO, press GO.

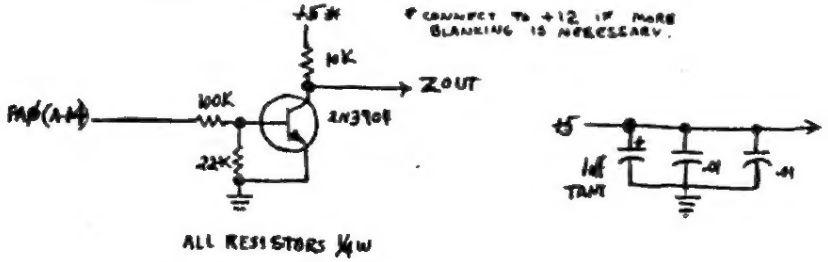

HEX DUMP OF "TRACE"

ADDR	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0200	A9	70	8D	FA	17	A9	02	8D	FB	17	4C	89	02	00	00	00
0210	00	00	00	00	00	00	00	00	00	00	00	AD	03	17	29	7F
0220	8D	03	17	A9	28	8D	0C	17	4C	C8	1D	12	0C	13	05	12
0230	13	13	13	13	86	85	85	8F	8F	85	85	86	88	84	87	87
0240	8D	8D	86	88	13	0B	0D	84	91	98	88	87	87	88	93	91
0250	84	88	91	86	99	8D	8D	99	96	88	0C	13	84	8F	8F	98
0260	8D	8D	86	88	13	13	84	8F	86	85	8D	86	88	13	13	0A
0270	85	F3	68	85	F1	68	8A	EF	85	FA	68	85	F0	85	FB	84
0280	F4	86	F5	BA	86	F2	20	86	1E	20	8C	1E	20	03	03	20
0290	19	1F	D0	F5	20	03	03	20	19	1F	F0	F8	20	19	1F	F0
02A0	F3	20	6A	1F	C9	15	10	E1	C9	14	F0	4C	C9	10	F0	4C
02B0	C9	11	F0	34	C9	12	F0	37	C9	13	F0	39	0A	0A	0A	0A
02C0	85	FC	A2	04	A4	FF	D0	0A	B1	FA	06	FC	2A	91	FA	4C
02D0	D7	02	0A	26	FA	26	FB	CA	D0	EA	F0	10	A5	FA	D0	02
02E0	C6	FB	C6	FA	A9	01	D0	02	A9	00	85	FF	4C	89	02	20
02F0	63	1F	4C	89	02	4C	1B	02	A5	EF	85	FA	A5	F0	85	FB
0300	4C	E4	02	20	8F	03	A9	FF	8D	01	17	A2	00	A5	EF	85
0310	F6	A5	F0	85	F7	20	B1	03	A5	F2	85	F6	A9	01	85	F7
0320	20	B1	03	A5	FD	85	F6	A5	EE	85	F7	20	B1	03	A0	3C
0330	BD	2B	02	20	6B	03	E8	88	D0	F6	20	8B	03	A5	F1	A0
0340	08	2A	48	A9	10	90	02	A9	11	20	6B	03	68	88	D0	F1
0350	A2	03	B5	F2	20	60	03	A9	13	20	6B	03	CA	D0	F3	60
0360	48	4A	4A	4A	4A	20	6B	03	68	29	0F	30	2A	8E	89	03
0370	AA	BD	EB	03	8D	FF	03	A2	0B	BD	DF	03	30	04	2E	FF
0380	03	2A	20	97	03	CA	D0	F1	A2	03	60	A9	46	D0	02	A9
0390	60	86	FD	A2	10	D0	04	86	FD	A2	03	49	00	8D	00	17
03A0	CA	D0	FD	8E	00	17	A6	FD	60	00	00	00	00	00	00	00
03B0	00	A0	03	BD	2B	02	20	6B	03	E8	88	D0	F6	A5	F7	20
03C0	60	03	A5	F6	20	60	03	8E	DE	03	A2	03	A9	13	20	6B
03D0	03	B1	F6	20	60	03	C8	CA	D0	F2	20	8B	03	A2	03	60
03E0	90	02	88	9E	08	02	0C	03	03	08	02	FC	30	6E	7A	B2
03F0	DA	DE	70	FE	FA	F6	9E	CC	3E	CE	C6	1E	01	E6	00	00

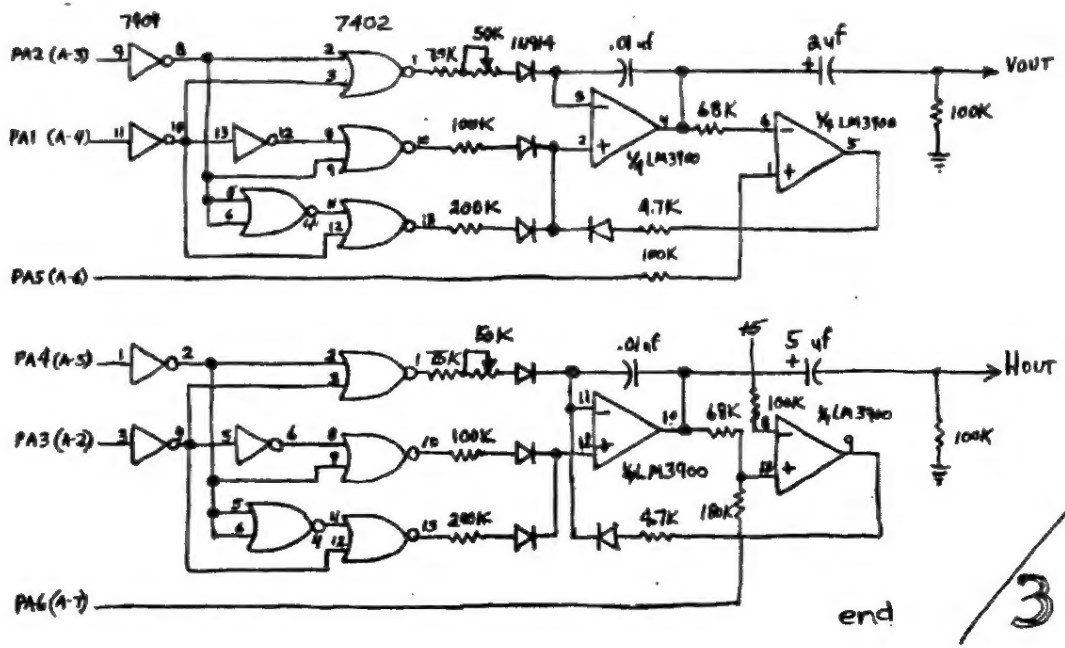

P[illegible] p A. Wasson
9[illegible] Hindry Pl.
Los Angeles, CA 90045

TWO "NEW" INSTRUCTIONS FOR THE 6502

Have you ever wondered if those undefined op codes for the 6502 do anything? Well, there are at least two "new" instruction that I have discovered. First let me warn you that they are undocumented and are subject to change by the manufacturer. Also they are a little strange.

The first is op code 7E which I have given the nmemonic DXE which stands for "Decrement if index register X Equals zero". The only address mode is absolute. The use of the DXE only seems to effect the N flag, which appears to be undefined but depends on the value of X.

The second op code is 9E. I have given it the mnemonic SXNE, which stands for "Set effective address to one if index register X does not equal zero, otherwise set to zero". The only addressing mode is absolute indexed by Y. It does not appear to set any flags.

There also appear to be some redundant op codes, such as, 66=C6, 6A=0A, etc. My search has by no means been exaustive so there may still be some more undiscovered instructions.

The date code on my 6502 is 0676 so it doesn't have the ROR instruction. If the 6502 is microprogrammed later versions may respond differently to these op codes.

Some comments & corrections from- Mike Firth, 104 N. St. Mary, Dallas, TX 75214

Before going to the main point of my letter, I want to say that I have my programming for my Polymorphics Video Board running nicely. It has the built in ability (by changing a flag) to work with 32 or 64 character lines, allowing for the wiring scheme of the Poly board (ie. ignore address line 5 for 32 characters). The programming includes all of the screenread functions, home, line feed, carriage return, blank screen, backspace, forward curser (without changing characters) up and down curser. For my own purposes I will be working on an editor (or adapting HELP which I have bought but not yet received) to permit character editing and writing of the screen to tape and loading from tape to the screen.

I am about to buy the 8K base 2 (advertised in ON LINE) S-100 board, which is $125 for the slower speed I can use and is by far the cheapest I have seen. Will let you know.

MORE TRIAC

It may be a bit late, but I do have to point out a couple of things about the notes on running a triac from KIM in issues 3 and 4. The original (#3,p.8) works much better if the load is attached to MT2 and the plug or power supply is to MT1 (in other words, exchange the labels at the right of the bottom diagram on page 8.)

I am somewhat surprised the circuit shown in the diagram in RUN4 (p.6) works at all, for several reasons. First, I believe the resistance connection from the photocell (shown as 10K) should go to MT2 and not beyond the load.

The flicker that is mentioned can come from either of two sources, both of which should make the circuit work poorly. The Radio Shack CdS cells that I purchased (and have used for other projects) have a very slow decay time, on the order of a second. Secondly, making an incandescent lamp respond in something like a single cycle (120 per second) is very unlikely. Therefore, the pulses are modulating the lamp just above and below the trigger brightness needed for the triac. Well, sometimes, due to slight shifts in the characteristics of the lamp and the cell and the triac the trigger signal will either come late in the cycle or just miss for several cycles causing flicker. (Example, lamp heats photo resister, changing resistance, lamp is pulsed less often, unit is cooler, slowly the resistance changes, besides the light effect.) I think examination of the Triac wave forms will show a very sloppy output that may harm some motors. Take care.

MORE ON THE TRIAC FROM: G. THOMPSON, 39 JUDSON ST. ROCHESTER, N.Y.

'HERE IS A REVISION ON CASS LEWART'S TRIAC INTERFACE (#3, P. 8) [redacted]
THAT IMPROVES SHUT OFF.

IWAS RUNNING A 25W. BULB AND NOTICED THAT SHUT-OFF WAS NOT IMMEDIATE-THE BULB WOULD GLOW AT HALF BRILLIANCE FOR A SECOND OR SO-THEN EXTINGUISH. A SCOPE SHOWED THAT THE TRIAC WAS ACTING LIKE AN SCR DURING THIS DIMMED PERIOD, THAT IS, HALF-WAVE INSTEAD OF FULL. THE SMALL RESISTOR (R) WAS ADDED AFTER STUDYING RADIO SHACKS CIRCUITS FOR DIACS AND TRIACS. IT WORKS ONA 25W. BULB, AN AQUARIUM PUMP , AND A 1/20 HP WATER PUMP!

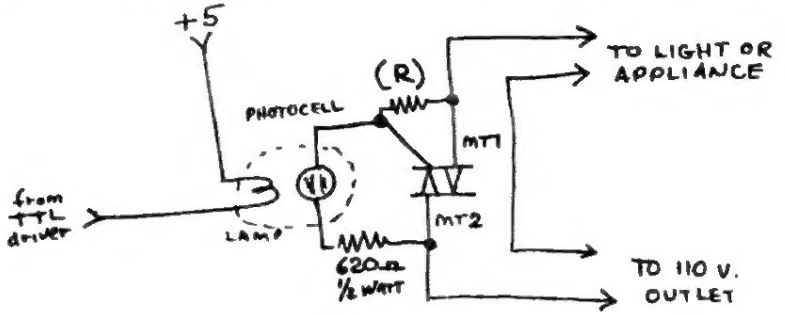

10 < R < 50Ω depending on load

****

Charles C. Ohsiek
Box 853
Patchogue, NY 11772

This code allows writing an ID on the audio cassette tape prefixing the data SUPERTAPE writes out. This ID can then be shown by VU-TAPE, or ignored by the KIM-1 tape monitor.
The ID consists of one byte, or two hex characters, at address 17F9; these two hex characters MUST BE IDENTICAL; i.e., 11, 77, AA, etc. NOT 01, 07, etc.; otherwise it cannot be viewed properly on LED's. This allows fourteen different ID's before duplicating.

Relocatable

```
(01BF C3 03 7E   END OF  SUPERTAPE)
 01C2 A0 BF      START   LDY    #$BF      Set directional
 01C4 8C 43 17           STY    PBDD      .reristers
 01C7 A2 08              LDX    #$08      Send 8
 01C9 A9 16              LDA    #$16      .sync
 01CB 20 61 01           JSR    NIC       ..characters
 01CE A9 2A              LDA    #$2A      Send
 01D0 20 88 01           JSR    OUTCHT    .asterisk
 01D3 AD F9 17           LDA    ID        Setup to send
 01D6 A2 64              LDX    #$64      .100
 01D8 86 E0              STX    TIC       ..ID characters
 01DA 48         LP      PHA              ..save character
 01DB 20 70 01           JSR    OUTDT     ....send it
 01DE 68                 PLA              .....bring it back
 01DF C6 E0              DEC    TIC       Decrement counter
 01E1 D0 F7              BNE    LP        Do it again
 01E3 4C 00 01           JMP    DUMPT     Now--start SUPERTAPE
```

George W. Hawkins, NY

Here's a 2 task (foreground/background?) alternating scheduler routine. This routine (which resides in page one) divides the remainder of page one in half and manages two stacks while alternating control between each task. This allows two programs to be run together in the Kim as long as each program uses the stack or separate memory locations for the storage of temporary data. Set the address of task (program) one into 0100-01, and the address of task two into 0102-03. Connect A15 to E4 and start at 0107. Control will alternate as determined by the interval timer delay value and division rate in locations 0153 and 0155 respectively. Rescheduling will end when one of the programs issues a JMP START back to Kim.

```
****
0100 10          TIL  10.          TASK 1 START ADDRESS (currently = 0010)
0101 00          TIH  00,
0102 00          T2L  00,          TASK 2 START ADDRESS (currently = 0200)
0103 02          T2H  02,
0104 00          TSEL 00.          NEXT TASK TO EXECUTE (alternates)
0105 FF          TSTK FF,          CURRENT STACK POINTER TASK 1
0106 A9          TST1 A9.          TASK 2

0107 A9 00       TINL LDA I  00.   START WITH TASK 1
0109 8D 04 01        STA A  TSEL
010C 8D AD 01        STA A  01,AD ZERO TASK 2'S STATUS WORD
010F A2 FF           LDX I  FF.   TASK 1 STACK POINTER
0111 8E 05 01        STX A  TSTK
0114 9A              TXS          INIT STACK POINTER
0115 A9 A9           LDA I  A9.   TASK 2 STACK POINTER
0117 8D 06 01        STA A  TST1
011A A9              A9,          LOAD A
011B 39               LOW  TINT   WITH INTERRUPT ADDRESS
011C 8D FE 17        STA A  IRQL
011F A9              A9,          LOAD A
0120 01               HIGH TINT
0121 8D FF 17        STA A  IRQH
0124 AD 02 01        LDA A  T2L   SET TASK 2 START ADDRESS
0127 8D AE 01        STA A  01,AE
012A AD 03 01        LDA A  T2H
012D 8D AF 01        STA A  01,AF
0130 58              CLI          INTERRUPTS ON
0131 A9 01           LDA I  01,   1 INTERVAL ON TIMER
0133 8D 0F 17        STA A  17,0F 0F 1024
0136 6C 00 01        JMP @  TIL   START TASK 1

                                  TASK SWITCHING
0139 48          TINT PHA          SAVE A
013A 8A              TXA          SAVE X
013B 48              PHA
013C 98              TYA          SAVE Y
013D 48              PHA
013E BA              TSX          GET STACK POINTER
013F 8A              TXA
0140 AC 04 01        LDY A  TSEL  GET TASK SELECTOR
0143 99 05 01        STA AY TSTK  SAVE ## STACK POINTER
0146 98              TYA          SELECT OTHER TASK
0147 49 01           EOR I  01,
0149 A8              TAY
014A 8D 04 01        STA A  TSEL
014D B9 05 01        LDA AY TSTK  START OTHER TASK
0150 AA              TAX
0151 9A              TXS          RESTORE STACK POINTER
0152 A9 01           LDA I  01,   RESCHEDULE 1 INTERVAL
0154 8D 0F 17        STA A  17,0F 0F 1024
0157 68              PLA
0158 A8              TAY          RESTORE Y
0159 68              PLA
015A AA              TAX          RESTORE X
015B 68              PLA          RESTORE A
015C 40              RTI          BACK TO MORE USEFUL THINGS
```

end

A CATALOG OF KIM-1 ROM BYTES. (Hal Gerdon, Oakland, CA) The debug program TRACER by Larry Fish in the Aug. 1977 KILOBAUD makes innovative use of the 6502 BIT instruction, using masks in memory locations for non-destructive testing of bits in the accumulator. Since BIT lacks the immediate addressing mode, masks must be either at a zero-page or absolute address. Any byte in the KIM ROM can serve as a mask, to test not only single bits but also the absence of 2 or more bits (e.g. BIT with a memory location containing 0F will set the Z flag only if the accumulator bits 0-3 are all 0). With the help of a simple program, I found 175 of the 256 possible bytes in the KIM ROM, and recorded the lowest address for each one. The table (high nybble on horizontal, low on vertical) gives this address (e.g., an 08 exists at address 1981).

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	185D	19A4	18B5	1974	1A89		193F		1A69	183F	1980	1986		181A	1EFD	1884
1	1C38	1C9D	1F6B	1C5F	1897	1DF4	1825	1881		198C		1CB4		18BF		188A
2	1853	1CA1	1E64	1806	1808	1FE2		1887			1812		1E1C			1C15
3	19EE	1CA5	1905	186F	1810		1CD4						19CD	1C7B	1EF9	18C1
4	1855	1900	1848		19A9		1813		1C0F		1CB0		198F	1E68		1C10
5	1E74	1C91	1F92		1FE4		1F92	1A94	185E		1CDC		1D20	1DF2		1828
6	18BB	1815	1CBF		1A47		194E		1C11		1DC8		1E10		1DA0	182E
7	188D	1804	1809		19A2				1FEE		19AC				1847	1837
8	1981	1870		1A58	19A0		19C2	1E9C	1994	195C	194C		1A22	1E9B	184D	181B
9	199F	1807	196F		1A66		1957				1800	1D2D	18A5		1894	1822
A	18AA	1898	181D		1962	1C6B	1C4D	1817	1D0B	1A7B	1CF7	1C13	1819		186C	185F
B		1DE2		1CEB	1FDF							1C93		1C75	1996	1861
C	191C	1864	19A1		1862		1C10		197D	18D6	199A		1C82		1803	1C39
D	189C	1C63	1F09	1F0D					1802	1CF5	1801	1E31	1836		1834	1A52
E		1A03	1A16		1899	182B		19A7	197A	1983	1997		1EB2	1FF4	183A	1C20
F	1871	1C73	1842	1E92	1863		1967	1DE0			1C62	180E	1F8A	1881	187E	1892

A Compiler for the 6502

Help is needed to complete development of a table driven compiler for the 6502. I have completed the parser and the production procedure programs but have had trouble in deciding which language to implement. Anyone interested in this compiler should contact me as to preference of language, desired features, etc.

I also need help in designing methods to implement parameter passing to subroutines, formatted I/O, and character string handling. If you feel that you could help solve these problems please write me and I will send more information.

I am currently on a S/370 compiler but I don't have a great deal of information on it. If anyone has access to BNF descriptions of this and other languages I would gladly pay for copying.

Contact: Ralph Deane, Box 33, Little Fort, B.C. Canada V0E 2C0

Program BRANCH

by Allen Anway
1219 North 21st St.
Superior, WI 54880

Many times I've pressed the GO button and many times the KIM has flown off into hyperspace somewhere or the stack has punched out my carefully written program in page 1. In self defense I wrote BRANCH to go through my program, find the branch instructions and force the branch to see where I would end up. This program is fully relocatable and uses only locations 0000 and 0001 in the regular RAM. The program uses a few locations at the top of page 0, but this is all right as long as you do NOT single step BRANCH. Enter the program at the beginning and press the following buttons:

KEY 0 Decrement POINTH of address
KEY 1 Decrement POINTL of address
KEY 4 Increment POINTH of address
KEY 5 Increment POINTL of address

When keys held down continuously, the addresses will change continuously after a very short wait.

KEY C Seek branch instruction of the form XXXX 0000 and stop there. (Be careful, program stops at DATA of this same form.)

KEY D Force the branch, starting at the branch instruction address.

KEY E Above branched correctly, restore old branch address, remain in this program, next press C to look for another branch.

KEY F Above branched incorrectly, stop the program but restore the old branch address so you can correct the erroneous entry. Then press PC and GO and check your new entry by pressing D.

```
0343 08        STARTB  CLD
0344 A5 FA             LDA POINTL
0346 85 EF             STA PCL
0348 A5 FB             LDA POINTH
034A 85 F0             STA PCH    ; PC button is enabled
034C A5 00             LDA TEML
034E 85 FA             STA POINTL
0350 A5 01             LDA TEMH
0352 85 FB             STA POINTH
---------------------------------
0354 A9 80     A0      LDA #$80
0356 85 F3             STA NU     ; control repetition
0358 20 19 1F  A1      JSR SCAND
035B F0 F7             BEQ A0     ; A0 on no key pressed
035D 20 6A 1F          JSR GETKEY
0360 85 F4             STA KEY
0362 A5 F3             LDA NU
0364 85 F1             STA NUM
0366 20 19 1F  A2      JSR SCAND
0369 F0 08             BEQ A3     ; A3 on key released
036B C6 F1             DEC NUM
036D D0 F7             BNE A2     ; A2 on key depressed short time
036F A9 10             LDA #$10   ; key held long time,
0371 85 F3             STA NU     ;   go for repetition
---------------------------------
0373 A5 F4     A3      LDA KEY
0375 C9 0F             CMP #$0F
0377 D0 0B             BNE A4     ; A4 on not key F
0379 A5 00             LDA TEML   ; key F = leave program
037B 85 FA             STA POINTL;   but set up for old branch instruc.
037D A5 01             LDA TEMH
037F 85 FB             STA POINTH
0381 4C 4F 1C          JMP START
---------------------------------
0384 C9 0C     A4      CMP #$0C
0386 D0 10             BNE A5     ; A5 on not key C
0388 20 63 1F  A41     JSR INCPT  ; key C = seek branch
038B 20 19 1F          JSR SCAND  ; pick up program step from SCAND
038E A5 F9             LDA INH
0390 29 1F             AND #$1F   ; look for branch format
0392 C9 10             CMP #$10
0394 D0 F2             BNE A41    ; A41 on branch not found
0396 F0 BC             BEQ A0     ; stop looking, branch found
---------------------------------
```

more →

```
0398 C9 0D     A5      CMP #$0D
039A D0 3A             BNE A8     ; A8 on not key D
039C A5 FA             LDA POINTL; key D = perform jump
039E 85 00             STA TEML
03A0 A5 FB             LDA POINTH
03A2 85 01             STA TEMH
03A4 20 63 1F          JSR INCPT ; go to next location
03A7 20 19 1F          JSR SCAND ; pick up branch distance
03AA A5 F9             LDA INH   ;   from INH
03AC 48                PHA
03AD 20 63 1F          JSR INCPT ; next location for easy calc.
03B0 68                PLA
03B1 18                CLC
03B2 10 09             BPL A52   ; A52 on branch forward
03B4 65 FA             ADC POINTL; branch backward
03B6 B0 02             BCS A51   ; A51 on no page crossed
03B8 C6 FB             DEC POINTH; page crossed backward
03BA 18        A51     CLC
03BB 90 06             BCC A53
03BD 65 FA     A52     ADC POINTL
03BF 90 02             BCC A53   ; A53 on no page crossed
03C1 E6 FB             INC POINTH; page crossed forward
03C3 85 FA     A53     STA POINTL
03C5 18                CLC
03C6 90 8C             BCC A0    ; end of calculation
---------------------------------
03C8 C6 FB     A6      DEC POINTH; from A7 and A8
03CA B0 8C     A61     BCS A1    ; absolute jump
---------------------------------
03CC C6 FA     A7      DEC POINTL; from A8
03CE A5 FA             LDA POINTL
03D0 C9 FF             CMP #$FF
03D2 F0 F4             BEQ A6
03D4 90 82     A71     BCC A1    ; absolute jump
---------------------------------
03D6 C9 00     A8      CMP #$00  ; examine remaining keys
03D8 F0 EE             BEQ A6
03DA C9 01             CMP #$01
03DC F0 EE             BEQ A7
03DE C9 04             CMP #$04
03E0 F0 0B             BEQ A9
03E2 C9 05             CMP #$05
03E4 F0 0B             BEQ A10
03E6 C9 0E             CMP #$0E
03E8 F0 0C             BEQ A11
03EA 18                CLC
03EB 90 E7             BCC A71   ; A71 on no legal key pressed
---------------------------------
03ED E6 FB     A9      INC POINTH
03EF B0 D9             BCS A61   ; absolute jump
---------------------------------
03F1 20 63 1F  A10     JSR INCPT
03F4 B0 D4             BCS A61   ; absolute jump
---------------------------------
03F6 A5 00     A11     LDA TEML  ; key E = pick up old branch
03F8 85 FA             STA POINTL;   but remain in program
03FA A5 01             LDA TEMH
03FC 85 FB             STA POINTH
03FE B0 CA             BCS A61   ; absolute jump
```

end

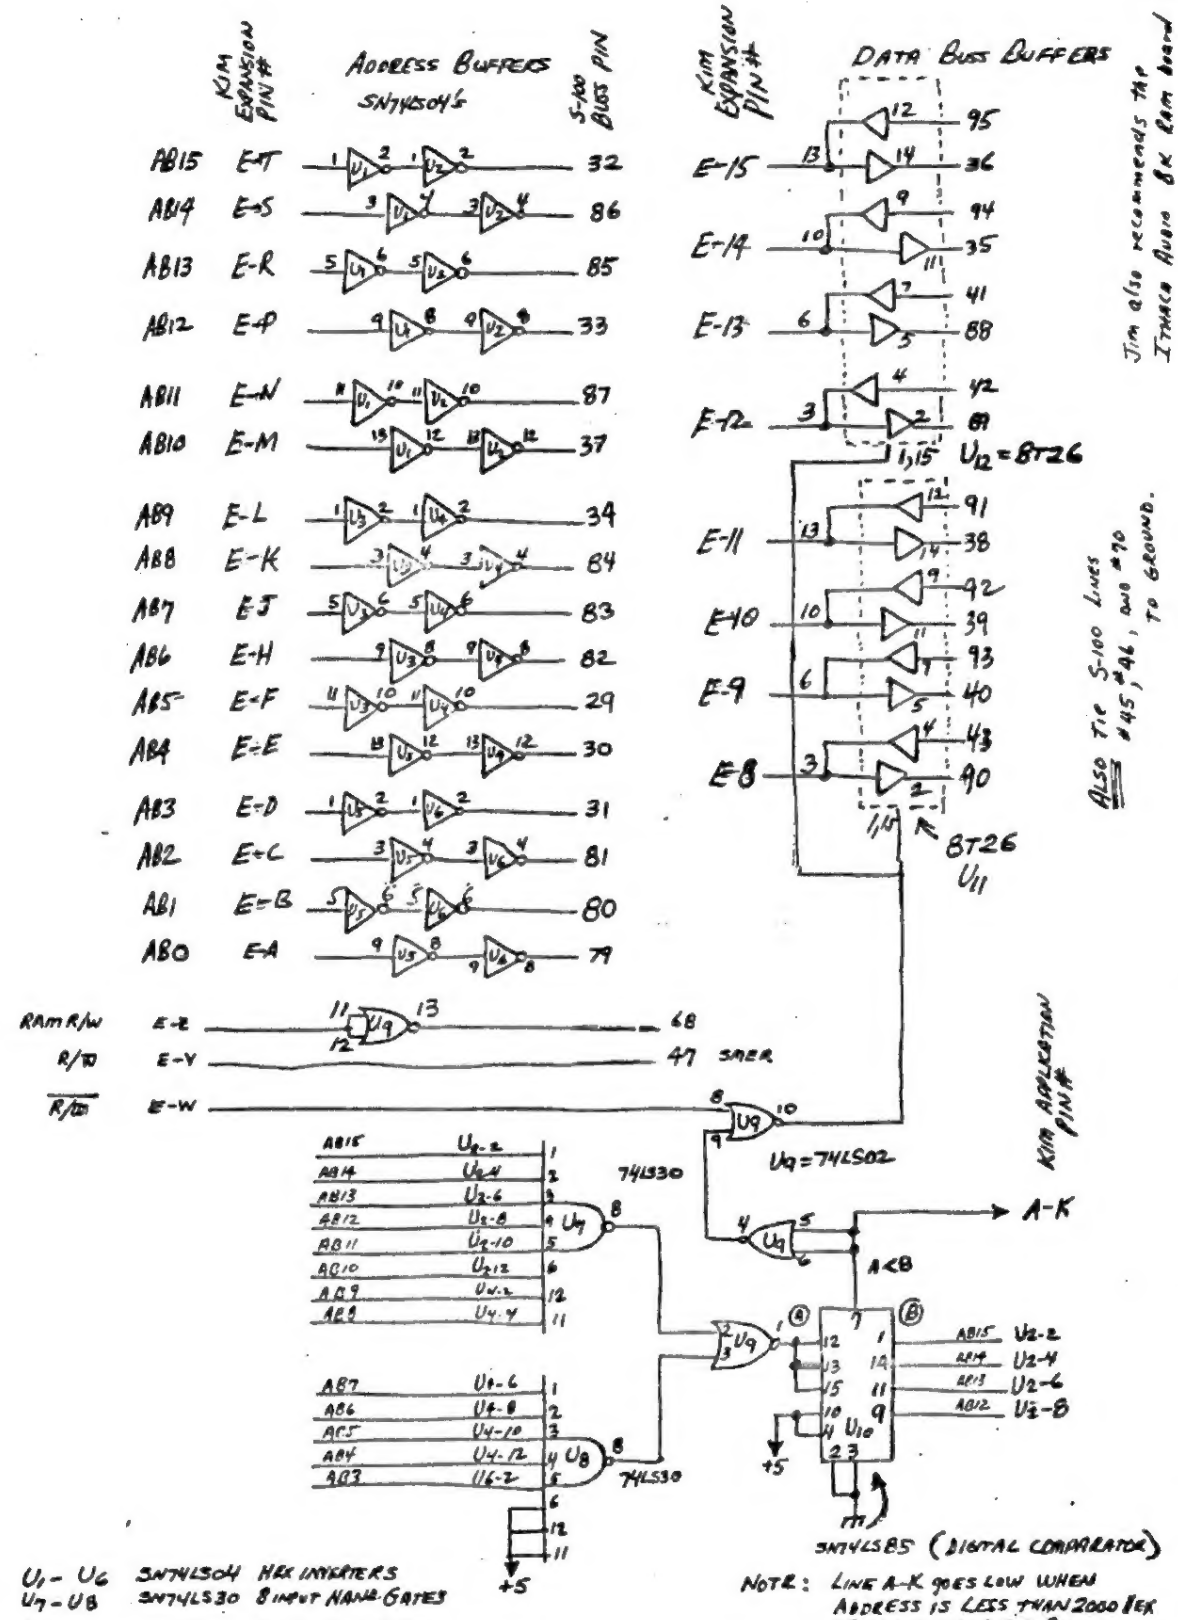

JIM ALSO RECOMMENDS THE ITHACA AUDIO 8K RAM BOARD (125.00)

ITHACA AUDIO
P.O. BOX 91
ITHACA, N.Y. 14850

KIM-1 → S-100 BUS ADAPTER

JIM POLLOCK
NEW ENGLAND, N.J.

(NOW YOU CAN TAKE ADVANTAGE OF ALL THAT LOW-COST MEMORY)

A NUMBER OF YOU HAVE REQUESTED BASIC LEVEL PROGRAM EXPLANATIONS! HARVEY LAYS AN EXCELLENT TUTORIAL ON US.. -ERIC-

A SIMPLE MUSIC PROGRAM FOR KIM by Harvey Heinz

Undoubtedly, the single most popular use for hobby computers is the programming and playing of games. However, another common use is the playing of music with the micro-computer. Most programs used for this purpose tend to be quite elementary and so it follows that the music generated leaves much to be desired from a quality point of view. Dispite this, music is a good subject for the computer hobbyist to pursue, for the following reasons.

1. The basic principals are very simple but can be elaborated on to any degree desired. In fact,electronic music can become a hobby in itself.
2. Writing a music program makes one very consious of execution times of his machines instruction set.
3. Playing music on the computer is ideal for demonstrating to the layman the versatality of these machines.

As a KIM-1 owner, I had an additional reason for attempting to write such a program. As you know, the 6530 has a programmable interval timer that may be used to interrupt the MPU. I felt that by using this feature, a very simple program could be designed. At the same time I would be gaining experience in using this valuable feature, and also learn something about using the interrupt.

The program which evolved is flow-charted in Fig. 1. Actually there are two separate programs. The main routine consists mostly of initialization. The working part of this program though is the timing loop at the end. Every 4 microseconds Reg. Y is decramented. When the contents of this register become 0, the output is toggled, thus pusing the speaker to the opposite position to the one previously held. Register Y is then re-initialized, and the process repeats. This will happen continuously until the IRQ line is triggered by the interrupt. The value Reg. Y is initialized to determines the frequency of the note being played.

The interrupt routine is only a little more complicated. The timer has originally been initialized to a value called TEMPO. This value is what determines whether the tune plays fast or slow. The timer is loaded with this value by accessing it with address 170F. This automatically programs the timer to count down 1 for every 1024 clock periods. At the same time, PB7 is initialized to act as an interrupt flag.

Approximately 20 times per second (with TEMPO equal to 28_{16}) the timer will reach 0 and initiate an interrupt. The constant LENGTH is then decremented and tested for 0. If not 0, the timer is re-initialized, and return is then made to the main program. If LENGTH is equal to 0, the interrupt fetches the next note and next duration from the tune table after first checking that the tune is not over. After re-initializing the timer, return is made to the main routine which will now generate the new note.

If the end of tune has been reached during the interrupt, a jump is made direct to the monitor, thus stopping the program. While this is not the proper way to return from an interrupt, in this case it does no harm. Fig. 2 is a listing of both programs.

The tune is listed as a separate table (from the program) and so may be easily changed. Fig. 3 is a listing for the verse and chorus of Swanee River. Even bytes are constants which represent the frequency of the note. The following odd byte is a constant which represents the duration of the note. Refer to Fig. 4 for the correct values to use when coding a different tune.

A suitable value should be stored in TEMPO (00EA) to determine the speed the tune is played at. Try varying this value for interesting effects. The first empty address after the table should be stored at 00EB to stop the program when the tune is over.

Fig. 4 is a list of musical notes with their correct frequency and period in microseconds. Because our demonstration program has only a single time delay loop, the period must be divided by 4 to make it less then 1024. This does no harm except to raise the frequency generated. Our computer now sounds like a picolo or flute. This modified period is again divided by 4 (our 4 msec. timing loop) to give the proper argument for that frequency. As this number is decimal,it is finally converted to Hexadecimal to give the correct constant for that note.

The duration argument is derived by determining the shortest note in the selected musical piece. Assign an arbitrary value for this duration. Then simply assign integer multiples of this value for the longer notes. For Swanee River, I used 05 to represent 1 beat. Combining this value with 27 or 28 for TEMPO works out about right.

The hardware end of the project is also simple. Refer to page 57 of your User Manual. Hook up the speaker and transister amplifier as per the diagram, but connect it to PB0 (A9). Then connect PB7 (A15) to IRQ (E4). This last connection should be made through a switch or alligator clip so it can be broken when using the cassette interface.

Using the program can be a lot of fun, as well as being educational. Try slowing down or speeding up the music by changing just the 1 value TEMPO. That's a range of 256 to 1. Or play the tune backwards by changing only a few bytes in the program (decrement X). Or don't load a table at all.Just use the random numbers in memory as a computer generated tune. Anyway have fun. Isn't that what hobby computers are all about?

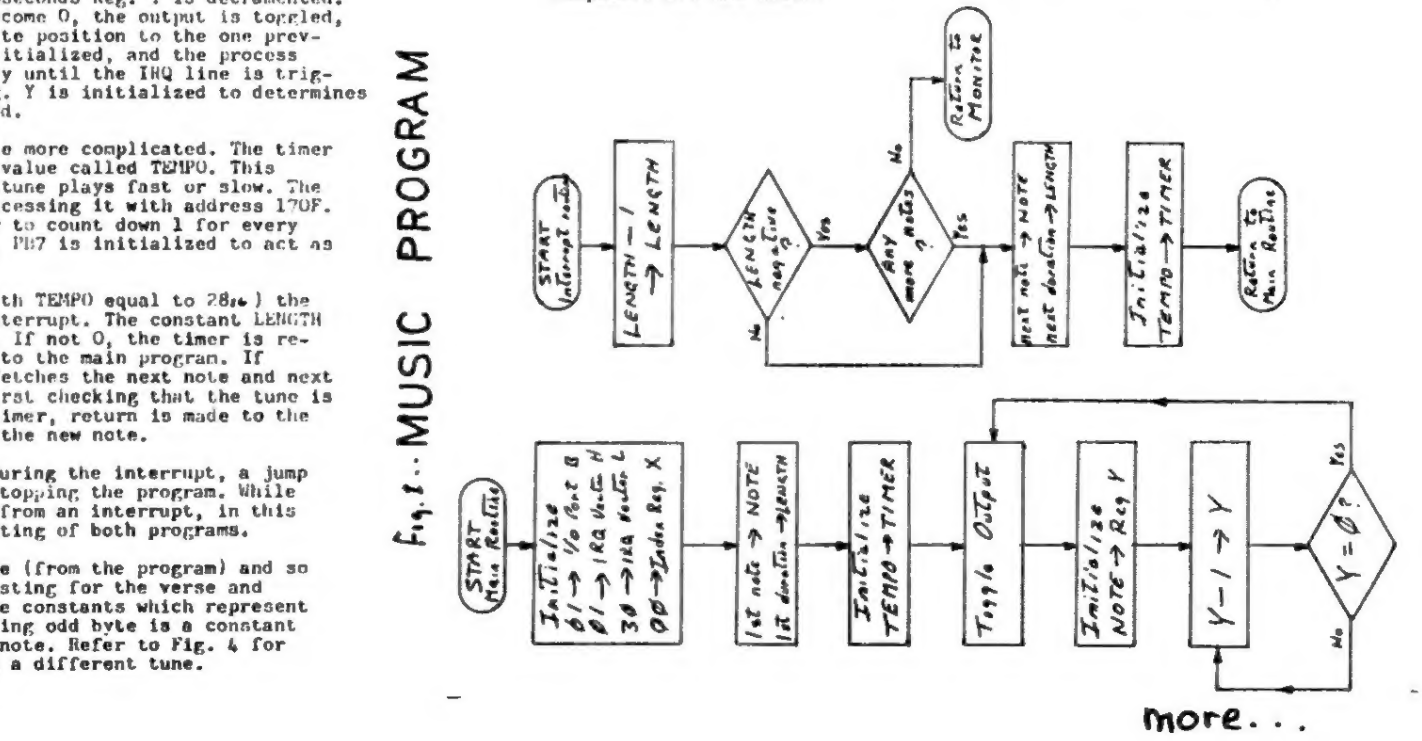

Fig. 1.. MUSIC PROGRAM

more...

Fig. 2--Music Program for KIM-1

A. Main Routine

```
A9  01      0100        LDA #01      Initialize
8D  03  17     2        STA PBDD          I/O Port B
8D  FF  17     5        STA 17FF          IRQ Vector High
A9  27         8        LDA #27           IRQ Vector low
8D  FE  17     A        STA 17FE
A2  00         D        LDX #00           Register X
B5  00         F        LDA TABLE,X
85  E8      0111        STA NOTE     Store first note in NOTE
E8             3        INX
B5  00         4        LDA TABLE,X
85  E9         6        STA LENGTH             and LENGTH
A5  EA         8        LDA TEMPO    Initialize TIMER
8D  0F  17     A        STA TIMER
EE  02  17     D  PLAY  INC PBD      Toggle output
A4  E8      0120        LDY NOTE     Initialize Reg. Y to NOTE
88             2  DELAY DEY          Decrement Reg. Y
D0  FD         3        BNE DELAY    If not zero, return
F0  F6      0125        BEQ PLAY     Time delay complete
```

B. Interrupt Routine

```
C6  E9      0127        DEC LENGTH   Decrement LENGTH
30  06         9        BMI NEXTN    If zero, get next note
A5  EA         B        LDA TEMPO    Reinitialize TIMER
8D  0F  17     D        STA TIMER
40          0130        RTI          And return to main routine
E8             1  NEXTN INX          Increment Index Register
E4  EB         2        CPX END      Test for tune over
D0  03         4        BNE CONT     No? then continue
4C  4F  1C     6        JMP START    Yes. Go to KIM monitor
B5  00         9  CONT  LDA TABLE,X  Fetch next note (Freq.)
85  E8         B        STA NOTE     and store in NOTE
E8             D        INX          Increment Index Reg.
B5  00         E        LDA TABLE,X  Fetch next duration
85  E9      0140        STA LENGTH   and store in LENGTH
A5  EA         2        LDA TEMPO    Reinitialize TIMER
8D  0F  17     4        STA TIMER
40          0147        RTI          Return to main routine
```

0000	Start of TABLE	TABLE
00E8	Location of current note frequency	NOTE
00E9	Location of current note duration	LENGTH
00EA	Constant here determines speed of tune	TEMPO
00EB	Contains first empty address after tune	END

Fig.3-Table For Swanee River Tune

```
E  4  0000  BE  14        B  3  0036  7F  0F
D  1     2  D5  05        C  1     8  77  05
C  1     4  EF  05        D  2     A  6A  0A
E  1     6  BE  05        G  5     C  9F  19
D  1     8  D5  05        A  1     E  8E  05
C  2     A  EF  0A        G  2  0040  9F  0A
C  2     C  77  0A        C  4     2  77  14
A  1     E  8E  05        A  2     4  8E  0A
C  3  0010  77  0F        F  2     6  B3  0A
G  4     2  9F  14        A  2     8  8E  0A
E  2     4  BE  0A        G  8     A  9F  28
C  2     6  EF  0A        E  4     C  BE  14
D  8     8  D5  28        D  1     E  D5  05
E  4     A  BE  14        C  1  0050  EF  05
D  1     C  D5  05        E  1     2  BE  05
C  1     E  EF  05        D  1     4  D5  05
E  1  0020  BE  05        C  2     6  EF  0A
D  1     2  D5  05        C  2     8  77  0A
C  2     4  EF  0A        A  1     A  8E  05
C  2     6  77  0A        C  3     C  77  0F
A  1     8  8E  05        G  2     E  9F  0A
C  3     A  77  0F        E  1  0060  BE  05
G  2     C  9F  0A        C  1     2  EF  05
E  1     E  BE  05        D  4     4  D4  14
C  1  0030  EF  05        C  7     6  EF  23
D  4     2  D5  14
C  8     4  EF  28
```

Load 00EB (END) with 68

Load 00EA (TEMPO) with 28

Fig. 4--- Musical Notes with Frequency, Period, & Argument

Note	Frequency	Period	Period/4	Constant Dec.	Hex.
C	261.62	3822.3	956	239	EF
C#	277	3608	902	226	E2
D	294	3405	851	213	D5
D#	311	3214	804	201	C9
E	329.63	3033.8	759	190	BE
F	349	2864	716	179	B3
F#	370	2703	676	169	A9
G	392	2551	638	160	A0
G#	415	2408	602	151	97
A	440	2273	568	142	8E
A#	466	2145	536	134	86
B	493	2025	506	127	7F
C	523	1911	478	120	78
C#	554	1804	451	113	71
D	587	1703	426	107	6B
D#	622	1607	402	101	65
E	659	1517	379	95	5F
F	698	1432	358	90	5A
F#	740	1351	338	85	55
G	784	1276	319	80	50
G#	831	1204	301	75	4B
A	880	1136	284	71	47
A#	932	1073	268	67	43
B	988	1012	253	63	3F
C	1047	956	239	60	3C

AN A/D CONVERTER FROM... WILL HAPGOOD
WALTHAM, MASS

Here is a circuit for making very accurate A/D conversions using a Motorola dual-slope conversion chip. With the values shown, I get conversions of up to 1400 counts with 1 bit accuracy compared to the best digital voltmeter we have; zero drift is non measurable. With a larger integrating capacitor, the circuit will count past 2000 counts; with a longer software timing constant, you can get a full 16 bit count, but with a longer conversion time than the approximately 50 msec. my program uses.

The input signal must be positive, although you can float the return line by about a volt if desired. I set the two potentiometers to mid-scale before beginning adjustments so they won't be too far off. The transistor can be any PNP device, and is for protection against reversed input polarity, which otherwise might latch up the chip. Finally, avoid snapping the power supply on(by inserting a chip into a live socket); it can make the chip very non-linear, or even dead.

The software is relocatable. It is written for the output line to be PB0 in KIM, and the input line to be PB5. The program controls the ramp line; when it is on, the 1405 integrator is going negative. When it goes below zero(actually below a reference voltage), the ramp is reset and the integrator starts going positive. The up-ramp is timed once it crosses zero. At the end of the timed up ramp, the ramp control line is set, and the time required for the integrator to reach zero is counted. This is proportional to the input value. Subtracting an offset of 5 or 10 percent of the upramp count improves operation near zero; the exact amount subtracted is not critical. Notice the instructions to disable interrupts during the critical counting periods; the software must not be disturbed during this period.

The spec sheet on the MC1505L and Motorola Application Note #AN-757 contain more information on the chip and its use. I am currently using this circuit preceeded by an analog multiplexer to read up to 16 inputs accurately in less than 1 second, using only two computer interface lines. I find the circuit much easier to use than a 12 bit parallel A/D, and much cheaper in the bargin.

The chip operates by integrating a current proportional to the input for a fixed time period(set by the timing constant for the up-ramp). Then a down ramp period subtracts a reference current until the integrating capacitor returns to zero. Thus many circuit variables balance out. Loading Y with $06 and X with $00 gives an up-ramp constant of $0600, or 1500 decimal. During the up-ramp, this number is counted to zero to give the up ramp delay time. Once zero is reached, the ramp direction is reversed, and the same registers are counted up until the integrating capacitor returned to its original level. With the software as it is, I get 1500 decimal counts at an input voltage of 1.5 volts. However, the circuit counts somewhat higher than this before getting non-linear.

To reach a full 16 bit count of 65,000, a larger up ramp timing constant can be specified. This will charge the timing capacitor for a longer time, and result in higher counts for a particular input voltage. You may have to increase the size of the integrating capacitor to prevent it from limiting; and conversions will take longer as the size of the count goes up. The software as shown results in a 16 bit count but with a maximum count of 2000 decimal or so(in 11 bit range). Fiddle with the timing constant until the system counts linearly up to the desired range; then set the zero offset constant to between 5% and 10% of the up-ramp constant. Adjust the zero offset constant until the circuit reads zero; then trim the gain pot for the exact gain required, and finally, restrict the zero with the zero control.

I've included a routine which adds a simple but clear binary to bcd conversion. The routine assumes a 16 bit number and would probably be changed to 17 to avoid confusion.

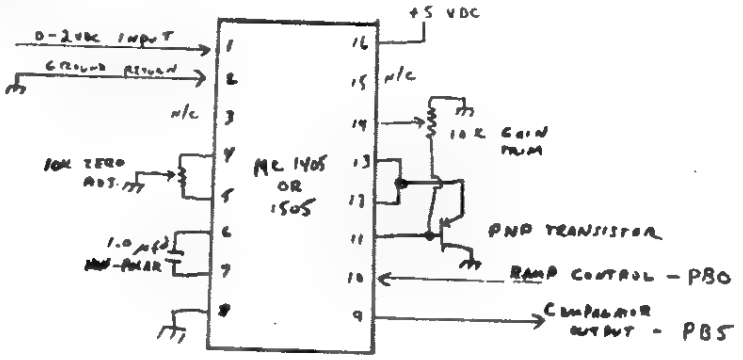

MC 1405 - A/D CIRCUIT

```
# INPUT MODULE OPERATES A SET-RESET DUAL-SLOPE A-D CONVERTER.
# INPUT LINE = PA5 (1920)
# PB0 IS OUTPUT LINE TO A-D.
# THIS MODULE INCLUDES BCD CONVERSION.
# INPUTS = NONE.  OUTPUTS = MSB IN X, LSB IN Y.
.SKIP 2
INPUT   LDA #%00000001 TURN RAMP ON AT PB0
        ORA PBDATA
        STA PBDATA
        LDA #$20        MASK FOR THIS INPUT
TEM1    BIT PBDATA
        BNE TEM1        LOOP TILL COMP GOES LOW
        LDX #0
        LDY #$06        TIMING CONSTANT FOR UP-RAMP
        DEC PBDATA      TURN RAMP OFF
TEM2    BIT PBDATA
        BEQ TEM2        LOOP TILL COMP GOES HIGH
        SEI             DISABLE IRQ
TEM3    DEX
        BNE TEM3
        DEY
        BNE TEM3
        INC PBDATA      TURN RAMP ON
TEM4    INX
        BNE TEM5
        INY
TEM5    BIT PBDATA
        BNE TEM4
        CLI             ENABLE IRQ
        DEC PBDATA      LEAVE RAMP OFF TO EQUALIZE CONVERSION TIMES
        TXA             SUBTRACT OFFSET TO IMPROVE OPERATION NEAR ZERO.
        SEC
        SBC #$40
        TAX
        TYA
        SBC #0
        TAY
#               AT THIS POINT, 16 BIT BINARY IS IN Y AND X.
```

more...

```
.SKIP 4
; SUB-MODULE BCD. NORMALLY ENTERED FROM INPUT ABOVE, BUT
; CAN ALSO BE CALLED INDEPENDENTLY.
;
; THIS MODULE CONVERTS A 16 BIT BINARY NUMBER INPUTTED IN
; Y AND X INTO THE 4 DECIMAL DIGITS CONTAINED BY MSD AND LSD.
; IT COUNTS DOWN Y, ADDING 256 TO LSD,MSD; THEN IT COUNTS DOWN
; X WHILE ADDING 1.
.SKIP 1
BCD     SED             USE DECIMAL ADDITION
        LDA #0          CLEAR OUTPUTS
        STA LSD
        STA MSD
        CPY #0          IF MSBITS = 0, DO LSBITS
        BEQ BCD2
BCD1    CLC             ADD 256 TO OUTPUT
        LDA LSD
        ADC #$56
        STA LSD
        LDA MSD
        ADC #2
        STA MSD
        DEY             AND DECREMENT MSBITS BY 1
        BNE BCD1        LOOP TILL ZERO
.SKIP 1
BCD2    CPX #0          IF LSBITS = 0, DONE
        BEQ BCD4
BCD3    CLC             ADD 1 TO OUTPUT
        LDA LSD
        ADC #1
        STA LSD
        LDA MSD
        ADC #0
        STA MSD
        DEX             AND DECREMENT LSBITS
        BNE BCD3        LOOP TILL ZERO
BCD4    LDX MSD
        LDY LSD
        CLD
        RTS
COPY COMPLETE.
```

KIM BLACKJACK
May 28, 1977

Jim Butterfield
14 Brooklyn Avenue
Toronto M4M 2X5, Canada

Description:

KIM uses a 'real' deck of cards in this game. So when you've seen four aces going by, you know that there will be no more - until the next shuffle.

BLACKJACK starts at address 0200. You'll see the cards being shuffled - the word SHUFFL appears on the display - and then KIM will ask how much you want to bet.

You'll start with an initial amount of $20. Your balance is always shown to the right of the BET? question, so on the first hand, you'll see BET? 20 on the display.

You may bet from $1 to $9, which is the house limit. The instant you hit key 1 to 9 to signal your bet, KIM will deal. Of course, you can't bet more money than you have ... and KIM ignores freeloaders who try to bet a zero amount.

After the deal, you'll see both your cards on the left of the display, and one of KIM's cards on the right. (KIM's other card is a "hole" card, and you won't see it until it's KIM's turn to play). Aces are shown as letter A, face cards and tens as letter F, and other cards as their value, two to nine. As always, Aces count value 1 or 11 and face cards count 10.

You can call for a third card by hitting the 3 button .. then the fourth card with the 4 button, and so on. If your total goes over 21 points, KIM will ungrammatically say BUSTED, and you'll lose. If you get five cards without exceeding 21 points, you'll win automatically. If you don't want any more cards, hit key 0. KIM will report your point total, and then will show and play its own hand. KIM, too, might go BUSTED or win on a five-card hand. Otherwise, the most points wins.

From time to time, KIM will advise SHUFFL when the cards start to run low.

Remember that you have a good chance to beat KIM at this game. Keep track of the cards that have been dealt (especially aces and face cards), and you're likely to be a winner!

KIM BLACKJACK

```
0200 A2 33     START  LDX #51      52 cards in deck
0202 8A        DK1    TXA          Create deck
0203 95 40            STA DECK,X    by inserting cards
0205 CA               DEX            into deck
0206 10 FA            BPL DK1         in sequence
0208 A2 02            LDX #2       Set up 3 locations
020A BD BB 03 INLOP   LDA INIT,X      ..into..
020D 95 75            STA PARAM        zero page
020F CA               DEX          addresshi/ dpt/ amt
0210 10 F8            BPL INLOP
0212 AD 04 17         LDA TIMER    use random timer
0215 85 80            STA RND       to seed random chain
0217 D8        DEAL   CLD          main loop repeats here
0218 A6 76            LDX DPT      next-card pointer
021A E0 09            CPX #9       less than 9 cards?
021C B0 34            BCS NOSHUF   9 or more, don't shuffl
                    ; shuffle deck
021E A0 D8            LDY #SHUF-$300  Set up SHUFFL msg
0220 20 57 03         JSR FILL         put in WINDOW
0223 A0 33            LDY #51        ripple 52 cards
0225 84 76            STY DPT      set full deck
0227 20 30 03 SHLP    JSR LIGHT    illuminate display
022A 38               SEC
022B A5 81            LDA RND+1    Generate
022D 65 82            ADC RND+2     new
022F 65 85            ADC RND+5      random
0231 85 80            STA RND         number
0233 A2 04            LDX #4
0235 B5 80     RMOV   LDA RND,X    move over
0237 95 81            STA RND+1,X   the random
0239 CA               DEX             seed numbers
023A 10 F9            BPL RMOV
023C 29 3F            AND #$3F     Strip to 0-63 range
023E C9 34            CMP #52      Over 51?
0240 B0 E5            BCS SHLP     yes, try new number
                    ; swap each card into random slot
0242 AA               TAX
0243 B9 40 00         LDA DECK,Y   get next card
0246 48               PHA          save it
0247 B5 40            LDA DECK,X   get random card
0249 99 40 00         STA DECK,Y    into position Y
024C 68               PLA          and the original card
024D 95 40            STA DECK,X    into the random slot
024F 88               DEY          next in sequence
0250 10 D5            BPL SHLP     bck for next card
```

more →

KIM BLACKJACK

```
                ; ready to accept bet
0252 A0 DE      NOSHUF LDY #MBET-$300   Set up BET? msg
0254 20 57 03          JSR FILL         put in WINDOW
0257 A5 77             LDA AMT          display balance
0259 20 A6 03          JSR NUMDIS       .. put in WINDOW
025C 20 30 03 BETIN    JSR LIGHT        illuminate display
025F C9 0A             CMP #10          not key 0 to 9?
0261 B0 F9             BCS BETIN        nope, ignore
0263 AA                TAX
0264 86 79             STX BET          store bet amount
0266 CA                DEX
0267 30 F3             BMI BETIN        zero bet?
0269 E4 77             CPX AMT          sufficient funds?
026B B0 EF             BCS BETIN        no, refuse bet
                ; bet accepted - deal
026D A2 0B             LDX #11          Clean WINDOW and
026F A9 00             LDA #0               card counters
0271 95 90      CLOOP  STA WINDOW,X
0273 CA                DEX
0274 10 FB             BPL CLOOP
                ; here come the cards
0276 20 78 03          JSR YOU          one for you..
0279 20 8F 03          JSR ME           & one for me..
027C 20 78 03          JSR YOU          another for you..
027F 20 64 03          JSR CARD         put my second card..
0282 86 7A             STX HOLE          ..in the hole
0284 20 28 03          JSR WLITE        wait a moment
                ; deal complete - wait for Hit or Stand
0287 20 30 03 TRY      JSR LIGHT
028A AA CA             TAX DEX          key input?
028C 30 11             BMI HOLD         zero for Stand?
028E E4 96             CPX UCNT         N for card #n?
0290 D0 F5             BNE TRY          nope, ignore  key
                ; Hit - deal another card
0292 20 78 03          JSR YOU          deal it
0295 C9 22             CMP #$22         22 or over?
0297 B0 40             BCS UBUST        yup, you bust
0299 E0 05             CPX #5           5 cards?
029B F0 53             BEQ UWIN         yup, you win
029D D0 E8             BNE TRY          nope, keep going
                ; Stand - show player's total
029F A5 95      HOLD   LDA WINDOW+5     save KIM card
02A1 48                PHA                  on stack
02A2 A2 00             LDX #0           flag player ..
02A4 20 0F 03          JSR SHTOT         .. for total display
02A7 A2 04             LDX #4
02A9 A9 00             LDA #0
02AB 95 90      HLOOP  STA WINDOW,X     clean window
02AD CA                DEX
02AE 10 FB             BPL HLOOP

                ; restore display card and hole card
02B0 68                PLA              display card
02B1 85 95             STA WINDOW+5     back to display
02B3 A6 7A             LDX HOLE         get hole card
02B5 20 6D 03          JSR CREC         rebuild
02B8 20 92 03          JSR MEX          play and display
                ; KIM plays here
02BB 20 28 03 PLAY     JSR WLITE        pause to show cards
02BE A5 9A             LDA MTOT         point total
02C0 C9 22             CMP #$22          ..22 or over?
02C2 B0 29             BCS IBUST          yup, KIM bust
02C4 65 9B             ADC MACE         add 10 for aces?
02C6 A6 91             LDX WINDOW+1     five cards?
02C8 D0 18             BNE IWIN           yes, KIM wins
02CA C9 22             CMP #$22         22+ including aces?
02CC 90 02             BCC POV          nope, count ace high
02CE A5 9A             LDA MTOT         yup, ace low
02D0 C9 17      POV    CMP #$17         17 or over?
02D2 B0 2C             BCS HOLD2         yes, stand..
02D4 20 8F 03          JSR ME            no, hit..
02D7 D0 E2             BNE PLAY         unconditional Branch
                ; KIM wins here
02D9 20 28 03 UBUST    JSR WLITE        show player's hand..
02DC 20 55 03          JSR BUST         make BUST message..
02DF 20 28 03          JSR WLITE        ..and show it
02E2 A5 77      IWIN   LDA AMT          decrease balance
02E4 F8 38             SED SEC
02E6 E5 79             SBC BET          ..by amount of bet
02E8 85 77      JLINK  STA AMT          store new balance
02EA 4C 17 02 XLINK    JMP DEAL         next play
                ; Player wins here
02ED 20 55 03 IBUST    JSR BUST         make BUST message..
02F0 20 28 03 UWIN     JSR WLITE        display pause
02F3 A5 77      ADD    LDA AMT          increase balance
02F5 F8 18             SED CLC
02F7 65 79             ADC BET          by amount of bet
02F9 A0 99             LDY #$99         $99 maximum..
02FB 90 01             BCC NOFLO        have we passed it?
02FD 98                TYA              yes, restore $99
02FE D0 E8             BNE JLINK        unconditional branch
                ; KIM stands - compare points
0300 A2 03      HOLD2  LDX #3           flag KIM..
0302 20 0F 03          JSR SHOTOT        .. for total display
0305 A5 9A             LDA MTOT         KIM's total..
0307 C5 97             CMP UTOT         vs. Player's total..
0309 F0 EF             BEQ XLINK        tie, no score;
030B B0 D4             BCS IWIN         KIM higher, wins;
030D 90 E4             BCC ADD          KIM lower, loses.

                ; subroutines start here
                ; SHTOT shows point totals per X register
030F B5 97      SHTOT  LDA UTOT,X       player's or KIM's total
0311 F8 18             SED CLC
0313 75 98             ADC UACE,X       try adding Ace points
0315 C9 22             CMP #$22         exceeds 21 total?
0317 B0 02             BCS SHOVER       yes, skip
0319 95 97             STA UTOT,X       no, make permanent
031B D8         SHOVER CLD
031C B5 97             LDA UTOT,X       get revised total
031E 48                PHA              save it
031F A0 E2             LDY #TOT-$300    set up TOT- msg
0321 20 57 03          JSR FILL          put in WINDOW
0324 68                PLA              recall total
0325 20 A6 03          JSR NUMDIS       insert in window
                ; display pause, approx 1 second
0328 A0 80      WLITE  LDY #$80         timing constant
032A 20 30 03 WDO      JSR LIGHT        illuminate screen
032D 88                DEY              countdown
032E D0 FA             BNE WDO
                ; illuminate display
0330 84 7F      LIGHT  STY YSAV         save register
0332 A0 13             LDY #$13
0334 A2 05             LDX #$5          6 digits to show
0336 A9 7F             LDA #$7F
0338 8D 41 17          STA PADD         set directional reg
033B B5 90      DIGIT  LDA WINDOW,X
033D 8D 40 17          STA SAD          character segments
0340 8C 42 17          STY SBD          character ID
0343 E6 7B     WAIT    INC PAUSE
0345 D0 FC             BNE WAIT         wait loop
0347 88 88             DEY DEY
0349 CA                DEX
034A 10 EF             BPL DIGIT
034C 20 40 1F          JSR KEYIN        switch Dir Reg
034F 20 6A 1F          JSR GETKEY       test keyboard
0352 A4 7F             LDY YSAV         restore Y value
0354 60                RTS
```

```
                        ; fill WINDOW with BUST or other message
0355 A0 E6      BUST    LDY #$BST-$300
0357 84 74      FILL    STY POINTR
0359 A0 05              LDY #5          six digits to move
035B B1 74      FILLIT  LDA (POINTR),Y  load a digit
035D 99 90 00           STA WINDOW,Y    put in window
0360 88                 DEY
0361 10 F8              BPL FILLIT
0363 60                 RTS

                        ; deal a card, calc value & segments
0364 A6 76      CARD    LDX DPT         Pointer in deck
0366 C6 76              DEC DPT         Move pointer
0368 B5 40              LDA DECK,X      Get the card
036A 4A 4A              LSRA LSRA       Drop the suit
036C AA                 TAX             0 to 12 in X
036D 18         CREC    CLC             no-ace flag
036E D0 01              BNE NOTACE      branch if not ace
0370 38                 SEC             ace flag
0371 BD BE 03           LDA VALUE,X     value from table
0374 BC CB 03           LDY SEGS,X      segments from table
0377 60                 RTS
                        ; card to player, including display & count
0378 20 64 03 YOU       JSR CARD        deal card
037B E6 96              INC UCNT        card count
037D A6 96              LDX UCNT        use as display pointer
037F 94 8F              STY WINDOW-1,X    put card in Wndw
0381 A0 10              LDY #$10        ten count for aces
0383 90 02              BCC YOVER       no ace?
0385 84 98              STY UACE        ace, set 10 flag
0387 18 F8      YOVER   CLC SED
0389 65 97              ADC UTOT        add points to..
038B 85 97              STA UTOT         ..point total
038D D8                 CLD
038E 60                 RTS
                        ; card to KIM, including display & counts
038F 20 64 03 ME        JSR CARD        deal card
0392 C6 99      MEX     DEC MCNT        inverted count
0394 A6 99              LDX MCNT        use as (r) display pontr
0396 94 96              STY WINDOW+6,X    into window
0398 A0 10              LDY #$10        ten count for aces
039A 90 02              BCC MOVER       no ace?
039C 84 9B              STY MACE        ace, set 10 flag
039E 18 F8      MOVER   CLC SED
03A0 65 9A              ADC MTOT        add points to..
03A2 85 9A              STA MTOT         .. point total
03A4 D8                 CLD
03A5 60                 RTS
                        ; transfer number in A  to display
03A6 48         NUMDIS  PHA             save number
03A7 4A 4A              ISRA LSRA       extract left digit
03A9 4A 4A              LSRA LSRA
03AB A8                 TAY
03AC B9 E7 1F           LDA TABLE,Y     convert to segments
03AF 85 94              STA WINDOW+4
03B1 68                 PLA             restore digit
03B2 29 0F              AND #$0F        extract right digit
03B4 A8                 TAY
03B5 B9 E7 1F           LDA TABLE,Y     convert to segments
03B8 85 95              STA WINDOW+5
03BA 60                 RTS
                        ; tables in hex format
03BB 03 00 20  01 02 03 04 05 06 07 08 09 10 10 10 10
03CB F7 DB CF  E6 ED FD 87 FF EF F1 F1 F1 F1
03D8 ED F6 BE F1 F1 B8  FC F9 F8 D3
03E2 F8 DC F8 C0   FC BE ED 87 F9 DE
```

03EC

end

'XIM'

(Extended I/O Monitor)

A TTY, command oriented, programming tool for KIM-1

1. Resides in 1K of memory. Relocatable (with checklist) and ROM-able.
2. Adds 17 commands to resident KIM TTY monitor.
3. Includes 4 user defined commands for expansion.
4. Designed around a modular concept for easy modification.

FUNCTIONS

*Load alpha-numeric (ASCII) characters into ram via TTY.
*Print a memory block on the TTY as alpha-numeric (ASCII) characters.
*Calculate relative branches.
*Compare two data blocks and display all discrepancies.
*Load op-codes and operands into memory sequentially via TTY.
*Execute a program at a designated address.
*HEX Dump: Display memory as a 16 column matrix of two digit HEX codes.
*Jump to the KIM monitor.
*Fill a data block with a constant.
*Move one block of data to another.
*Block-search for a string of data up to 256 bytes long in any given block and display the starting address(es) of the string.
*Set up the audio tape address buffers via TTY in sequential fashion.
*CONTROL D. Used for command termination, during initialization.

Break point (BRK) service routine.

BRK point processing routine saves and displays all CPU registers on the TTY. Status register is printed as a string of 1's and 0's for program debugging.

Features OP-code reinsertion at BRK point for multi BRK processing.

Manual & Cassette: $12.00
Manual & Punched tape: $10.00
(post paid USA)
NJ residents add 5% tax.

PYRAMID DATA SYSTEMS
6 Terrace Ave.
New Egypt, N.J.
08533

A NUMBER OF YOU HAVE WANTED A LIST OF KIM MONITOR ROUTINES WITH EXPLANATIONS

S. STRANDTOFT
Mollebakken 27
GUDERUP
6430 NORDBORG
DENMARK

**** KIM-1 RESIDENT PROGRAM'S AND SUBROUTINE'S ****

-NAME-	-COMMENT-
MAIN	
DUMPT	DUMP MEM TO TAPE
LOADT	LOAD MEM FROM TAPE
INTVEC	SUB TO MOVE SA TO VEC +1,2
CHKT	COMPUTE CHKSUM FOR TAPELOAD. RTN USES Y TO SAVX +
OUTBTC	OUTPUT ONE BYTE. USES Y TO SAVX BYTE
OUTBT	OUTBTC WITHOUT CHKSUM
HEXOUT	CONVERT LSD OF A TO ASCII AND OUTPUT TO TAPE
OUTCHT	OUTPUT TO TAPE ONE ASCII CHAR VIA SUB'S ONE + ZERO
SUB'S	
ONE	OUTPUT "1" TO TAPE. 9 PULSES 138 MICROSEC EACH
ZRO	OUTPUT "0" TO TAPE. 6 PULSES 207 MICROSEC EACH
INCVEC	SUB TO INC VEC+1,2
RDBYT	SUB TO READ BYTE FROM TAPE
RDBYT2	MULTI ENTRY POINT
PACKT	PACK A=ASCII INTO SAVX AS HEX DATA
RDCHT	GET 1 CHAR FROM TAPE. RETURN CHAR IN A. USE SAVX+1 TO ASM CHAR
RDBIT	GETS ONE BIT FROM TAPE AND RETURNS IT IN SIGN OF A
MAIN	
PLLCAL	OUTPUT 166 MICROSEC PULSE STRING FOR TAPE-PLL CALIBRATION
SAVE	KIM ENTRY VIA STOP (NMI) OR BRK (IRQ)
SAVE1	KIM ENTRY VIA JSR (A LOST)
SAVE2	(ISS) X, Y, S
RST	KIM ENTRY VIA RST
DETCPS	DETECT CHAR PER SEC (BAUD-RATE)
START	MAKE TTY/KB SELECTION
CLEAR	CLEAR INPUT BUFFER INH, INL AND READ
READ	GET CHAR
TTYKB	MAIN ROUTINE FOR KEYBOARD AND DISPLAY. IF NO KEY, A= 0
GETK	KIM-KEYBOARD FETCH-PROGRAM
GETS	TEST CHAR IN DETCPS
DATA	SHIFT CHAR IN A INTO HIGH ORDER NIBBLE AND DISPLAY
ADDR	DISP ADR
STEP	INCPT + START
PCCMD	DISPLAY PC BY MOVING PC TO POINT
LOAD	LOAD PAPERTAPE FROM TTY. CHECK FOR ";"
LOADS	LOAD PAPERTAPE FROM TTY. CHECK FOR BYTECOUNT
DUMP	DUMP TO TTY FROM OPEN CELL ADRESS TO LIMHL, LIMHH
SPACE	OPEN NEW CELL
SHOW	PRINT OPEN CELL
RTRN	OPEN NEXT CELL
GOEXEC	RUN-ISS. PROGRAM RUNS FROM OPEN CELL ADR
SCAN	TTY-CMD DETECTION PROG
FEED	OPEN PREVIOUS CELL, PRINT
MODIFY	GET CONTENTS OF INPUT BUFF INL AND STORE IN LOC SPECIFIED BY POINT
SUB'S	
PRTPNT	SUB TO PRINT POINTL, POINTH
CRLF	SUB TO PRINT CR + LF
PRTST	PRINT STRING OF ASCII CHAR FROM TOP+X TO TOP
PRTBYT	PRINT ONE HEX BYTE AS TWO ASCII CHAR'S
HEXTA	CONVERT TO HEX NIBBLE AND PRINT ASCII
GETCH	GET 1 CHAR FROM TTY. CHAR IN A. X PRESERVED. Y = FF
GETS	GETCH MULTI ENTRY POINT
INITS	INITIALIZATION FOR SIGMA
INITI	INITS MULTI ENTRY POINT
OUTSP	PRINTS 1 SPACE
OUTCH	PRINT 1 CHAR = A. X PRESERVED. Y = FF
DELAY	DELAY 1 BIT. TIME AS DETERMED BY DETCPS
DEHALF	DELAY HALF BIT TIME
AK	KEY OUT DEP OR TTY MODE, A=0. KEY DEP OR KB MODE, A NOT ZERO
ONEKEY	LIKE AK, BUT X, Y NOT INITIATED
SCAND	OUTPUT 3 BYTES TO 7 SEGMENT DISPLAY. DATA SPECIFIED BY POINT
SCANDS	OUTPUT TO 7 SEGMENT DISPLAY.
CONVD	CONVERT AND DISP HEX (SCAND)
INCPT	SUB TO INCREMENT POINTL, POINTH
GETKEY	FROM KEYBOARD. A = KEYVALUE. ILLEGAL OR NO KEY FOR A GT. 15
CHK	SUB TO COMPUTE CHECK SUM
GETBYT	GET 2 HEX CHAR'S AND PACK INTO INL. INH. X PRESERVED. Y = 0
PACK	SHIFT CHAR IN A INTO INL. INH. A = 0 FOR HEX
HEXNUM	CONVERT TO HEX NUM WITHOUT CHECK. A = 0
HEXALP	CONVERT TO HEX ALPHA
UPDATE	SHIFT A INTO LSD AND STORE IN I/O BUFFER INL. INH
OPEN	MOVE I/O BUFFER INL. INH TO POINTL. POINTH
TAB	KIM MESSAGE TABLE AND 7-SEGMENT CONVERT TABLE

14

A KIM BIBLIOGRAPHY FROM ....

WILLIAM R. DIAL
438 ROSLYN AVE
AKRON, OHIO
44320

Ohio Scientific Instruments, 11679 Hayden Ave., Hiram, OH 44234
"Model 300 Computer - Trainer Lab Manual"
A series of 20 programs for instruction on the 6502 microprocessor based Model 300 Trainer. Programs are easily adapted to KIM-1 operation.

Ohio Scientific Instruments, 11679 Hayden St., Hiram, OH 44234
"Application Note No. 2"
OSI 480 Backplane and Expansion System.

Ohio Scientific Instruments, 11679 Hayden St., Hiram, OH 44234
"OSI Application Note No. 5"
Interfacing OSI Boards to other systems including KIM-1.

Ohio Scientific Instruments, 11679 Hayden St., Hiram, OH 44234
"OSI Model 430 Super I/O Board Instruction Manual"

Ohio Scientific Instruments, 11679 Hayden St., Hiram, OH 44234
"Model 420C, 4K Memory Expansion Board"
Instruction Manual - use together with OSI Application Note No. 2 on the 480 Backplane and Application Note No. 5 on interfacing OSI boards to other systems including KIM-1.

ON-LINE, 24695 Santa Cruz Hwy., Los Gatos, CA 95030
This classified ad newsletter often announces KIM-1 and 6502 software and hardware accessories. 18 issued $3.75.

Helmers, Carl, "There's More to Blinking Lights Than Meets the Eye"
Byte 1, No. 5, pp. 52-54 (January 1976)
A program for creating patterns of flashing lights (LEDs).

Lloyd, Robert G., "There's More to Blinking Lights, etc."
KIM-1/6502 Users Notes
A KIM-1 version of Carl Helmers earlier program in Byte.

Ziegler, John, "Breakpoint Routine for 6502"
Dr Dobbs Journal 1, No. 3, pp. 17-19 (1976)
Requires a terminal and a TIM Monitor. Upon entering, the program counter is printed, followed by the active flags, accumulator, register, Y register and stack pointer.

Anon., "What's New Kim-o-sabee?"
Byte 1, No. 8, p. 14 (April 1976)
Brief notes on KIM-1.

Espinosa, Chris, "A String Output Subroutine for the 6502"
DDJ 1, No. 8, p. 33 (September 1976)
This routine saves pointers, loops, etc. in outputting the string.

Maier, Marcel, "6502 String Output, Revisited"
DDJ 1, No. 10, p. 50 (November 1976)
Further mod of Espinosa's earlier routine.

ANON., "Control Logic for Microprocessor Enables Single Step"
Electronic Design, p. 78 (October 11, 1976)
Uses 6502 system.

ANON., "6502 Disassembler"
Interface Age, p. 14 (September 1976)

Butterfield, Jim, "KIM Goes to the Moon"
Byte 2, No. 4, pp. 8-9, 132 (April 1977)
A lunar lander program; see also same program in KIM-1/6502 users notes.

Hybrid Technologies, P.O. Box 163, Burnham, PA 17009
"A4 for KIM-1 Peripherals"
Byte 2, No. 8, p. 157 (August 1977)
2K/8K ROM based, EProm Programmer, 2K/4K/8K Ram boards, assembler board, TV Interface board, relay board, mother boards.

Laabs, John, "Build a $20 EPROM Programmer"
Kilobaud No. 9, pp. 70-77, (Sept 1977)
KIM-1 is used to run software and some external hardware to program the 5204 4K EPROM.

Ohio Scientific Instruments, Hiram, Ohio, 44234, "A Computer that Thinks in BASIC"
Kilobaud No. 9, p. 10, (Sept 1977)
Announcement of OSI's Model 500 CPU board built on 6502. Complete with 8K Basic in ROM for $298.

Clarke, Sheila, "A PET for Every Home"
Kilobaud No. 9, pp. 40-42, (Sept 1977)
A look at the Commodore PET 2001 based on the 6502. About $600 includes Video terminal keyboard, 12K, (8K Basic in ROM and 4K operating system).

American Institute for Professional Education, Carnegie Bldg., Hillcrest Road, Madison, N. J., 07940, "Microprocessing Fundamentals"
Circular Advertisement - approx. Aug 15, 1977.
Dr. Joseph B. Ross, Purdue Univ. and Dr. Garnett Hill, Oklahoma State Univ. will present a course in Fall of 1977 at several locations. Course is based on KIM-1 hardware together with instruction in Digital Devices, Programing fundamentals, Advanced Programing, Peripherals, I/O addressing, applications, etc. Cost about $600 including a KIM-1 to keep after the course.

Gregson, Wilfred J. II, "RTTY with the KIM"
73 Magazine 9 No. 204, p 110-112 (Sept 1977)
A clever program for using KIM-1 and the 6-digit LED display as a readout for a RTTY signal. Simply feed the audio from a receiver into the tape input of KIM-1 and read the message as it flows across the display (about 45.5 baud, 60 wpm). Can also handle other ratio to 100 baud). Can also use KIM-1 as a display only, operating from an already available terminal unit.

Bumgarner, John O., "A-KIM-1 Sidereal/Solar Clock"
Interface Age 2 No. 9, p-36-37 (Aug 1977)

Atkins, R. Travis, "A New Dress for KIM"
Byte 2 No. 9, p-26-27 (Sept 1977)
Describes mounting the KIM-1 in a briefcase together with power supply, prototype boards, etc.

Chamberlin, Hal, "A Sampling of Techniques for Computer Performance of Music"
Byte 2 No. 9, p-62-83 (Sept 1977)
General Discussion of Music Generation plus detailed information on application to KIM-1 and a description of the hardware and software for a D/A music board and software package being marketed by Micro Technology Unlimited, 29 Mead St., Manchester, N.J., 03104. PC board alone is $6.00, assembled and tested D/A board $35.00, software package on KIM cassette is $13.00 additional.

Beals, Gene, PO Box 371, Montgomeryville, PA 18936, "User Group for the Commodore PET 2001 Computer"
Ref: On Line 2 No. 11 pg 2 (Aug 24, 1977)
Yearly membership $5.00 brings Users Notes publication.

Cater, J., 11620 Whisper Trail, San Antonio TX 78230, "Run OSI 6502 8K Basic on your TIM or JOLT"
On Line 2 No. 11, p. 3 (Aug 24, 1977)
Cost $4.00 for annotated source and object code of patches for TIM or JOLT."

Firth, Mike, 104 N. St. Mary, Dallas, Texas 75214, "Large Type Summary of Command Coder for 6502 plus addresses."
On Line 2 No. 11, p. 8 (Aug 24, 2977)
Cost: $0.13 stamp plus SASE.

House, Gil, PO Box 158, Clarksburg, Md., 20734, "6502 Legible Tape Labeler."
On Line 2 No. 11, p. 9 (Aug 24, 1977)
A program for TIM (JOLT DEMON), Hex tape and documentation $4.00

cont. on pg. 21

TTY RAPID LOAD

Markus P.Goenner,Buel,3205 Mauss,Switzerland

```
0000  D8        SIMPLD  CLD
0001  A9 00              LDA #$00
0003  85 F8              STA INL
0005  85 F9              STA INH
0007  20 2F 1E           JSR CRLF        PROGRAM-START: $0000
000A  20 5A 1E  ADDR      JSR GETCH
000D  C9 2D               CMP #'CR
000F  F0 05               BEQ DATA        PROGRAM DESCRIPTION:
0011  20 AC 1F            JSR PACK        AFTER YOU HIT THE "G"-KEY ON THE TTY,THE PROGRAM
0014  F0 14               BEQ AREA        ANSWERS WITH A "CR-LF".
0016  A5 F8        DATA    LDA INL         ENTER NOW THE ADDRESS WHERE YOU WISH TO LOAD DATA.
0018  85 FA               STA POINTL      LEADING ZERO'S NEED NOT TO BE ENTERED FOR THE
001C  A5 F9               LDA INH         ADDRESS FIELD.ON A "CR" FROM YOU,THE TTY PROCEED
001A  85 FB               STA POINTH      A "CR-LF" AND YOU ARE READY FOR ENTERING DATA IN
001C  20 2F 1E  LINE      JSR CRLF        HEXA CODE.JUST ONE BYTE AFTER THE OTHER.AT THE END
001F  20 5A 1E  INPUT     JSR GETCH       OF A LINE,TYPE A "CR" TO JUMP BACK IN THE MONITOR.
0022  C9 0D               CMP #'CR        TYPE AN "ESC" AND THE TERMINAL WILL PRINT A DOLLAR
0024  F0 F6               BEQ LINE        SIGN BEFORE A "CR-LF" AND THEN YOU ARE BACK IN THE
0026  C9 1B               CMP #'ESC       KIM-MONITOR.
0028  D0 0B               BNE STORE       BY THE WAY,THE PROGRAM IS FULLY RELOCATABLE.
002A  A9 24               LDA #'$         0008 D8 0
002C  20 A0 1E            JSR OUTCH       0200
002F  20 2F 1E            JSR CRLF        D8A900855F85F9205F1F205A1EC90DF0052 0AC1FF0F4A5F885
0032  4C 6A 1C            JMP CLEAR       F0A5F985FB202F1F205A1EC90DF0F6C91BD0 0BA924C0A01E20
0035  20 AC 1F  STORE     JSR PACK        2F1EA C641C20AC1FD0E5205A1E20AC1FA900A5F891FA20C31F
0038  D0 E5               BNE INPUT       1890D3$
003A  20 5A 1E            JSR GETCH
003D  20 AC 1F            JSR PACK
0040  A0 00               LDY #$00
0042  A5 F8               LDA INL
0044  91 FA               STA (POINTL),Y
0046  20 C3 1F            JSR INCPT
0049  18                  CLC
004A  90 E3               BCC INPUT
```

Add this to t[eal Time Clock program from issue #4.
If you didn't #4, then you'll find the RTC in THE
FIRST BOOK OF KIM.....the editor

Charles H. Parsons
80 Longview Rd.
Monroe Conn 06468

This is the temperature control I mentioned. That's about it for now. All this could be expanded or consolidated if desired.

I thought you might be interested in one thing which gave me a lot of trouble. When comparing the current temperature with the table I first tried to use BMI. This worked most of the time and then at a certain point it fell through. The trouble was that this is meant to be used with signed arithmetic and does not work if the subtraction results in a number that looks like a signed negative number. Switching to BCC cleared this up. Its easy enough to say " Look at the manual" but if you think you are doing the right thing this does not occur to you immediatly. I don't know if others have fallen into this trap but I thought it was worth mentioning.

Read Temperature Once Per Minute

Line	Code	Label	Instruction	Comment
0100	A581	TKTEMP	LDA SEC	Do At 50TH Second
0102	29FC		AND FC	
0104	C950		CMP #$50	
0106	F001		BEQ DO	
0108	60		RTS	
0109	208001	DO	JSR FREQ	Read Frequency At PB1
010C	A581		LDA SEC	
010E	29FC		AND FC	Capture For 4 Seconds
0110	C950		CMP #$50	
0112	F0F5		BEQ DO	
0114	F8		SED	Work In Decimal
0115	38		SEC	
0116	A5F9		LDA INH	Get LSB's Of Frequency
0118	8596		STA CFREQL	Put In Current Frequency
011A	E594		SBC LCAL	Subtract Calibration
011C	8589		STA CTEMPL	Put In Current Temperature
011E	A5FA		LDA POINTL	Repeat For MSB'S
0120	8597		STA CFREQH	
0122	E595		SBC HCAL	
0124	858A		STA CTEMPH	
0126	B00F		BCS POS	Exit If Result Is Positive
0128	A900		LDA #$00	Complement If Negative
012A	38		SEC	
012B	E589		SBC CTEMPL	
012D	8589		STA CTEMPL	
012F	A900		LDA #$00	
0131	E58A		SBC CTEMPH	
0133	09C0		ORA #$C0	And Put CX In CTEMPH
0135	858A		STA CTEMPH	
0137	D8	POS	CLD	Go Back To HEX
0138	60		RTS	Exit

Additional Zero Page Locations

0089	CTEMPL	LSB'S Of Current Temperature
008A	CTEMPH	MSB'S Of Current Temperature
0094	LCAL	LSB'S Of Calibration Constant
0095	HCAL	MSB'S Of Calibration Constant
0096	CFREQL	LSB'S Of Current Frequency
0097	CFREQH	MSB'S Of Current Frequency

This is a subroutine which when added to the clock display routine will read the input port PB1 exery minute at the 50TH second and subtract the calibration constant in zero page locations The calibration constant is the frequency at zero degree's.

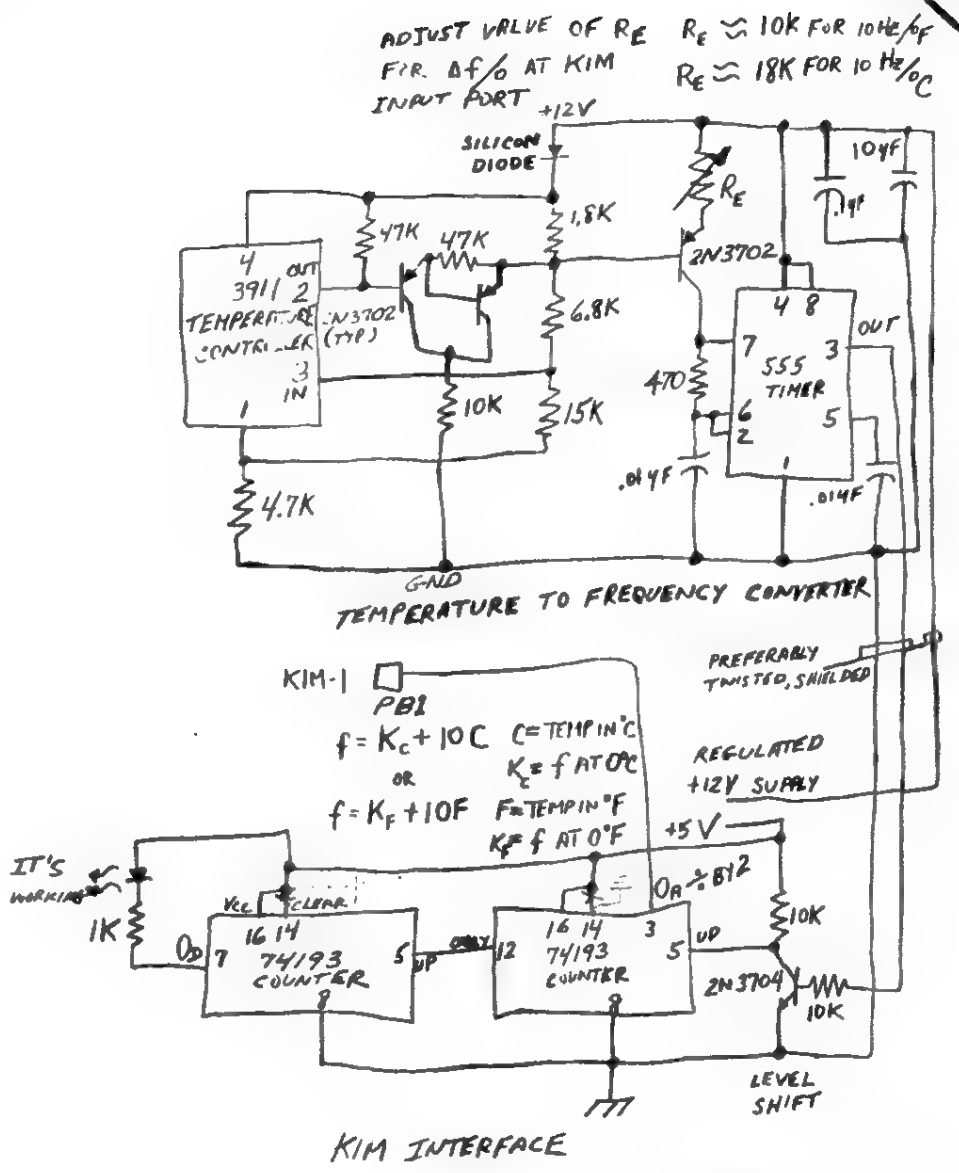

C.H. PARSONS 3-20-77

Twentyfour Hour Conversion

```
Line Code   Label  Instruction       Comment
1780 A582   HRA    LDA MIN      Do On The Hour
1782 D017          BNE OUTN
1784 A483          LDY HR       If Hour Is 12
1786 C012          CMP #$12     Set To Zero
1788 D002          BNE N
178A A000          LDY #$00
178C A584   N      LDA DAY      If Afternoon
178E 2901          AND #$01     Add 12
1790 F006          BEQ OK
1792 F8            SED
1793 18            CLC
1794 98            TYA
1795 6912          ADC #$12
1797 A8            TAY          Put In 24 Hour
1798 8498   OK     STY ALTHR    Counter
179A D8            CLD
179B 60     OUTN   RTS
```

Additional Zero Page Locations

```
0098        ALTHR              24 Hour Counter
```

This is a subroutine which generates a 24 hour clock. This is more convenient for control applications. This program could be incorporated in the clock interrupt routine if it were rewritten.

Display Current Temperature While 2 On KIM Is Pressed

```
Line  Code      Label   Instruction          Comment
0140  206A1F    DSTEMP  JSR GETKEY     Do When 2 Is Pressed
0143  C902              CMP #$02
0145  D02D              BNE RTS1
0147  A97F              LDA #$7F       Set Output Ports
0149  8D4117            STA PADD
014C  A20D              LDX #$0D       Initial Digit Number
014E  A002              LDY #$02       Output Two Bytes
0150  A589              LDA CTEMPL     Output Absolute Value Of
0152  85F9              STA INH        Temperature
0154  A58A              LDA CTEMPH
0156  293F              AND #$3F       Mask Sign
0158  85FA              STA POINTL
015A  20281F            JSR SCAND1     Display Temperature
015D  A58A              LDA CTEMPH
015F  29C0              AND #$C0       Minus?
0161  F00A              BEQ PLUS
0163  A07F              LDY #$7F       If So Superimpose Minus Sign
0165  8C4117            STY PADD       Set Input Ports
0168  A20B              LDX #$0B
016A  204E1F            JSR CONVD +6
016D  A900    PLUS      LDA #$00       Set Input Ports
016F  8D4117            STA PADD
0172  F0CC              BEQ DSTEMP     Do Again
0174  60      RTS1      RTS
```

This is a subroutine which when added to the clock display routine will display the current temperature on the KIM-1 display while 2 on the KIM-1 keyboard is depressed.

Temperature Control

```
Line Code   Label  Instruction       Comment
00B0 A581   CNTRLT LDA SEC      Do On The Minute
00B2 D033          BNE OUT2
00B4 A000          LDY #$00     Get Temperature
00B6 A69A          LDX TEMP
00B8 A58A          LDA CTEMPH
00BA 29C0          AND #$C0     If Minus Set To
00BC F002          BEQ ARND     Zero
00BE A200          LDX #$00
00C0 A598   ARND   LDA ALTHR    Select Day Or Night
00C2 C59F          CMP DAYST    Table Of Set Points
00C4 9004          BCC NITE
00C6 C5A0          CMP DAYEND
00C8 9002          BCC BGN
00CA A00A   NITE   LDY #$0A
00CC 8A     BGN    TXA
00CD A200          LDX #$00
00CF D19B   LP     CMP (TAB1),Y
00D1 D00B          BCC OUTP     If Temperature Preceeds
00D3 C8            INY          Set Point,Output
00D4 E8            INX          Proper Control Code
00D5 E00A          CPX #$0A     If Not Keep Looking
00D7 D0F6          BNE LP       Through Table To
00D9 A9FF   OUTP   LDA #$FF     To The End
00DB 8D0117        STA PADD
00DE 8A            TXA
00DF A8            TAY
00E0 B19D          LDA (TAB2),Y
00E2 8D0017        STA PAD      PA-0 Thru PA-7 Are
00E5 85A1          STA COUT     Output Ports
00E7 60     OUT2   RTS
```

Tables

```
17C1        TAB1               Temperature Set
----                           Points TD1-TDA
17CA
17CB                           Temperature Set
----                           Points TN1-TNA
17D4
17D5        TAB2               Control Codes
----
17DF
```

Temperature Control (continued)

Additional Zero Page Locations

```
Line Code   Label  Instruction       Comment
009B C1                              Temperature Table
009C 17                              Pointers
009D D5                              Control Table
009E 17                              Pointers
009F        DAYST                    Start Of Day Table
00A0        DAYEND                   End Of Day Table
00A1        COUT                     Current Control Code
```

This is a subroutine which puts a word at an output port which is determined by set points in a table. Refer to the work sheet for details.

Work Sheet For Temperature Control

		Alarm on off		Heat on off		Vent on off		Fan on off		Code
Output Port		PA7	PA6	PA5	PA4	PA3	PA2	PA1	PA0	
Temperature Range	Boundary Day Nite <TD1<TN1									
1	Too Cld TD1 TN1	1	0	1	0	0	1	0	1	A5
2	Hyst. TD2 TN2	0	0	1	0	0	1	0	1	25
3	Cold TD3 TN3	0	1	1	0	0	1	0	1	65
4	Hyst. TD4 TN4	0	1	0	0	0	1	0	1	45
5	Normal TD5 TN5	0	1	0	1	0	1	0	1	55
6	Hyst. TD6 TN6	0	1	0	1	0	0	0	1	51
7	Warm TD7 TN7	0	1	0	1	1	0	0	1	59
8	Hyst. TD8 TN8	0	1	0	1	1	0	0	0	58
9	Warmer TD9 TN9	0	1	0	1	1	0	1	0	5A
10	Hyst. TDA TNA	0	0	0	1	1	0	1	0	1A
11	Too Hot >TDA>TNA	1	0	0	1	1	0	1	0	9A

This is an example of a simple temperature control using four devices hooked to an eight bit output port. TD1-TDA & TN1-TNA represent the maximum temperatures in each temperature range. They are located in a table.

The lines labeled Hyst. are interposed between lines where action is taken to provide hysteresis between the on and off points of a device. They may not be necessary in a slow system but might be desirable in a fast system with tight control.

The code shown represents the proper word to place at the output port for proper control in any temperature range.

Each pair of outputs would be connected to a flip-flop for control of the respective devices.

Pack Temperature into 1 Byte Of Hybrid Code

```
Line Code   Label   Instruction      Comment

179C A581   PKTEMP LDA SEC      Do On The Minute
179E D020          BNE OUTP
17A0 A589          LDA CTEMPL   Divide By Ten
17A2 4A            LSR
17A3 4A            LSR
17A4 4A            LSR
17A5 4A            LSR
17A6 859A          STA TEMP
17A8 A58A          LDA CTEMPH   Use FF for overflow
17AA C916          CMP #$16     At 160 Degrees
17AC 9004          BCC #$04
17AE A9FF          LDA #$FF
17B0 859A          STA TEMP
17B2 18            CLC          Multiply CTEMPH
17B3 0A            ASL          By Ten
17B4 0A            ASL
17B5 0A            ASL
17B6 0A            ASL
17B7 9003          BCC SKIP     Test For Over 100
17B9 18            CLC          If So Convert MSB'S
17BA 69A0          ADC #$A0     To Hexadecimal
17BC 059A   SKIP   ORA TEMP     And Combine ½ Bytes
17BE 859A          STA TEMP
17C0 60     OUTP   RTS
```

Additional Zero Page Locations

009A TEMP Compressed Temperature

Although the temperature given by CTEMP is completely general it requires two bytes to describe. In order to reduce this to one byte and still provide a quasi-understandable code a hybrid notation was chosen. This code is limited to 0-159 degrees. The four LSB'S are retained in decimal notation and the four MSB'S are converted to hexadecimal.

ex. D6=136 degrees

Below 100 the temperatures can be read as decimal.

Frequency Counter Subroutine

```
Line Code   Label   Instruction      Comment

0180 A901   FREQ   LDA #$01     Set I/O Ports
0182 8D0317        STA PBDD
0185 A581          LDA SEC      Do For 4 Seconds
0187 A8            TAY
0188 2903          AND #$03
018A F038          BEQ BACK
018C 98            TYA
018D 2902          AND #$02     Display For Seconds
018F D030          BNE DSPL     3&4
0191 A900          LDA #$00     Zero Frequency Counter
0193 85F9          STA INH      And Count For Second 2
0195 85FA          STA POINTL
0197 85FB          STA POINTH
0199 F8            SED
019A AD0217 L      LDA PBD      Stall For One Pulse
019D 2902          AND #$02
019F D0F9          BNE L
01A1 AD0217 H      LDA PBD
01A4 2902          AND #$02
01A6 F0F9          BEQ H
01A8 18            CLC          Count One Pulse
01A9 A901          LDA #$01
01AB 65F9          ADC INH
01AD 85F9          STA INH
01AF A900          LDA #$00
01B1 65FA          ADC POINTL
01B3 85FA          STA POINTL
01B5 A900          LDA #$00
01B7 65FB          ADC POINTH
01B9 85FB          STA POINTH
01BB A581          LDA SEC      Still Second 2?
01BD 2901          AND #$01
01BF D0D9          BNE L        If So Keep Counting
01C1 201F1F DSPL   JSR SCANDS   Display Count
01C4 60     BACK   RTS
01C5 200003 RFREQ  JSR KIM      Start Here To Update
01C8 208001        JSR FREQ     Every 4 Seconds
01CB 18            CLC
01CC 90F7          BCC RFREQ    Loop
```

This is a subroutine which can be run by itself by entering at 01C5 or under program control with JSR FREQ. The output is the frequency at PB1 in Hertz.

end

A KIM BINARY DUMP + LOAD ROUTINE

John Oliver
Associate Professor of Astronomy
Williamson Hall
University of Florida
Gainesville FL 32611

FROM.

Well, I guess the time has come to stop enjoying the good stuff others have sent in and to start contributing myself. The enclosed program was written for SPICA (Small Portable Interactive Computer for Astronomy) to allow dumping and loading blocks of data (or code) under program control. I have put in lots of comments and it should be almost self explainatory. The user defines a buffer area and dumps or loads that area at a rate of about 1000 bytes in 12 seconds. If an incoming file exceeds the buffer length reading stops when the buffer is filled and an error flag is set. If the incoming file ID does not match the requested ID the buffer is filled and an error flag is set. We have a relay on one output line connected to the REMOTE jack on the recorder to start and stop the tape. (Soon we hope to use a PHIDEC recorder for better control.) I use as much of the KIM ROM as possible but I wish they had used more subroutines in there, its not as nice as it could have been. With these subroutines a $29 cassette recorder can become a useful digital data recorder at reasonably high data rates (100 bytes per second + housekeeping).

Other Misc. Comments: a) We have used SUPERTAPE and SUPERDUMP/LOAD on a Radio Shack CTR-29 and a Radio Shack Minisette-V (very nice because of the CUE feature) with few problems. With the Minisette-V we need to unplug the earphone when recording to get sucess. I have not good reason why ???? But others might watch out.

b) A simple RS-232 interface plus power-on reset is shown below...cheap too (sort of).

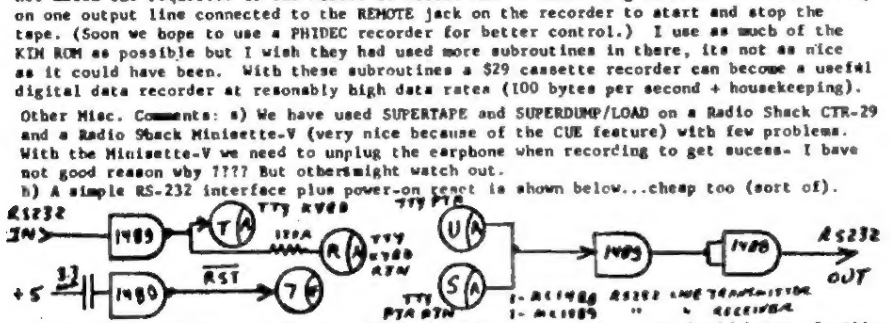

c) Many contributions to KUN show I/O interfacing ideas....everyone should become familiar with the Motorola 68XX line of support chips (get their good data book). A major virtue of the 6502 is that it is compatible with all that good Motorola stuff....ignore M's instructions to gate the addressing with VMA since address is always valid with the 6502. I have used the 6820 (PIA: 16 I/O lines plus 4 handshaking control lines) and the 6850 (ACIA: good for interface to a terminal or a large computer terminal port. They are coming out with floppy disk and tape recorder support chips soon.....I couldn't wait and am using a NEC floppy controller meant for an 8080 (ugh) but wish I had waited.

d) My 9 year old Jennifer Anne Oliver, loves MUMPUS and thanks you for publishing it..She runs KIM like a pro, they sure learn young.

```
;********** SUPERJUMP/SUPERLOAD BY JOHN P. OLIVER **********
;               DEPARTMENT OF PHYSICS AND ASTRONOMY
;              UNIVERSITY OF FLORIDA ,GAINESVILLE FL
;
;   THIS PROGRAM ALLOWS THE USE OF THE KIM-1 CASSETTE TAPE
; INTERFACE TO READ AND WRITE DATA BLOCKS UNDER PROGRAM CONTROL.
; IT IS DERIVED FROM JIM BUTTERFIELD'S SUPERTAPE ROUTINES IN
; AIM USERS NOTES #2 BUT EACH DATA BYTE IS WRITTEN AS AN 8-BIT
; CHARACTER RATHER THAN AS TWO ASCII CODED HEX CHARACTERS.  THUS
; 1K BYTES ARE DUMPED OR LOADED IN LESS THAN 12 SECONDS.  THE
; TAPE FORMAT HAS BEEN SOMEWHAT CHANGED IN THAT THE NUMBER
; OF BYTES IN THE RECORD ARE WRITTEN IN PLACE OF SAL/H. KIM ROM
; ROUTINES ARE USED AS FAR AS POSSIBLE WHILE KEEPING FULL
; SUBROUTINE STATUS FOR THESE PROGRAMS.
;
; TO WRITE A FILE:  PUT STARTING ADDRESS IN $17F5/6
;                   PUT ENDING ADDRESS + 1 IN $17F7/8
;                   PUT FILE ID IN $17F9
;
; THEN JSR SUPERD.  THIS ROUTINE CAN BE INTERRUPTED AS LONG
; AS THE INTERRUPT ROUTINES DO NOT TOTAL MORE THAN 100
; MICROSECONDS IN EACH 200 MICROSECONDS.
;
; TO READ A FILE:   PUT INPUT BUFFER ADDRESS IN $17F5/6
;                   PUT END OF BUFFER + 1 IN $17F7/8
;                   PUT DESIRED FILE ID IN $17F9 (USE $00 TO GET
;                   NEXT FILE, REGARDLESS OF ITS ID ON TAPE)
;
; THEN JSR SUPERL.  THE PROGRAM WILL RETURN WITH THE DATA IN
; THE BUFFER AREA.THE RECEIVED ID IN $17F9, AND A FLAG ($00CB):
;                   = 00        LOAD OK
;                   = FF OR = 7F    BUFFER OVERRUN
;                   = FE OR = 7E    CHECKSUM ERROR
;
; A FILE ID ERROR YIELDS 80, 7F, OR 7E.
;
; THE LOAD ROUTINE IS RELOCATABLE. TO RELOCATE THE DUMP ROUTINE
; MODIFY THE JSR'S TO  OUTCHR, OUTCHR, OUTBT, AND HEXTA.
;
; ANY TAPE RECORDER CONTROL ROUTINES MAY BE CALLED BEFORE SUPERL
; OR SUPERD.
;
; NOTE: SUPERL WILL NOT RETURN TO THE CALLING ROUTINE IF THE TAPE
; IS NOT READING PROPERLY.
;
                        ORG  $00CB
00CB  00        DESID   FCB  0          ;INTENDED INPUT ID
00CC  0F        EALD    FCB  0          ;BUFFER END ADDRESS
00CA  00        EAHD    FCB  0
00CB  0C        LFLG    FCB  0          ;LOAD FLAG WORD
00CC  00        GANG    FCB  0
00CD  0C        TIC     FCB  0
00CE  00        COUNT   FCB  0
00CF  C0        TMIB    FCB  0
00D0  02        NPUL    FCB  02
00D1  C3        TIMG    FCB  $C3
00D2  03                FCB  $03
00D3  7E                FCB  $7E
0100                    ORG  $0100      ;SUPERJUMP STARTS AT $0100
0100  A9 AD     SUPERD  LDA  #$AD       ;STA* OP CODE FOR VEB
0102  8D EC17           STA  VEB
0105  20 3215           JSR  INTVEB     ;INITIALIZE VEB
0108  A9 27             LDA  #$27
010A  85 CC             STA  GANG       ;SOD OUTPUT BOND
010C  A9 BF             LDA  #$BF       ;OPEN CHANNELS
010E  8D 4317           STA  PBDD
0111  A9 20             LDA  #$20       ;SEND 32 SYNC CHARACTERS
0113  85 CD             STA  TIC        ;SAVE CHAR COUNT
0115  A9 16             LDA  #$16       ;....SYNC ....
0117  48        HIC1    PHA             ;SAVE CHARACTER
0118  20 9001           JSR  OUTCHT
011B  68                PLA             ;RESTORE CHARACTER
011C  C6 CD             DEC  TIC        ;REDUCE COUNTER
011E  00 F7             BNE  HIC1       ;FINISHED?
0120  A9 2A             LDA  #$2A       ;SEND '*'
0122  20 9001           JSR  OUTCHT
0125  A9 00             LDA  #$00
0127  20 6E01           JSR  OUTBT      ;COMPUTE # OF BYTES ....
012A  38                SEC             ;.... TO BE SENT ....
012B  AD F717           LDA  EAL        ;....SAVE NBL ....
012E  ED F517           SBC  SAL        ;....TEMP ON STACK
0131  48                PHA
0132  AD F817           LDA  EAH
0135  ED F617           SBC  SAH
0138  20 6E01           JSR  OUTBT      ;OUTPUT NBH
013B  68                PLA             ;GET NBL AND ....
013C  20 6E01           JSR  OUTBT      ;....OUTPUT
013F  AD F917           LDA  ID         ;SEND....
0142  20 6E01           JSR  OUTBT      ;....ID
0145  20 EC17    SUPUPI  JSR  VEB        ;GET BYTE USING VEB ....
0148  20 8D01           JSR  OUTCHC     ;....AND SEND IT
014B  20 EA19           JSR  INCVEB     ;INCREMENT FOR NEXT BYTE
014E  AD ED17           LDA  VEB+1      ;ARE WE AT ....
0151  CD F717           CMP  EAL        ;.... END ADDRESS?
0154  AD EE17           LDA  VEB+2
0157  ED F817           SBC  EAH
015A  90 E9             BCC  SUPUPI     ;NOT FINISHED.GET MORE
015C  A9 2F             LDA  #$2F       ;SEND '/'
015E  20 9001           JSR  OUTCHT
0161  AD E717           LDA  CHKL
0164  20 6E01           JSR  OUTBT      ;SEND CHECKSUM
0167  AD E817           LDA  CHKH
016A  20 6E01           JSR  OUTBT
016D  60                RTS
016E  48        OUTBT   PHA             ;HEX OUTPUT ROUTINE;SAVE BYTE
016F  4A                LSR
0170  4A                LSR
0171  4A                LSR
0172  4A                LSR
0173  20 8101           JSR  HEXTA      ;GET 4 MSB AS ASCII
0176  20 9001           JSR  OUTCHT     ;WRITE IT
0179  68                PLA             ;RESTORE BYTE
017A  20 8101           JSR  HEXTA      ;GET 4 LSB AS ASCII
017D  20 9001           JSR  OUTCHT     ;WRITE IT
0180  60                RTS
0181  29 0F     HEXTA   AND  #$0F       ;MASK OFF 4 LSB
0183  C9 0A             CMP  #$0A
0185  18                CLC
0186  30 02             BMI  HEXTA1
0188  69 07             ADC  #$07       ;A TO F
018A  69 30     HEXTA1  ADC  #$30       ;0 TO 9
018C  60                RTS
018D  20 4C19    OUTCHC  JSR  CHKT       ;CHECKSUM CALCULATION
0190  A0 08      OUTCHT  LDY  #$08       ;SET FOR 8BITS
0192  84 CE             STY  COUNT      ;SAVEBIT COUNT
0194  A0 02      TRY     LDY  #$02       ;SET FOR 3PHASES
0196  84 CF             STY  TMIB       ;SAVEPHASE COUNT
0198  B6 D0      ZON     LDX  NPUL,Y     ;# OF 1/2 CYCLES
019A  48                PHA             ;SAVE CHARACTER
019B  78                SEI             ;DISABLE INTERRUPTS
019C  2C 4717    ZON2    BIT  CLKRD1     ;TIMER DONE?
019F  10 FB             BPL  ZON2       ;NO.WAIT
01A1  B9 D100           LDA  TIMG,Y     ;GET WAIT TIME IN MICRO ....
01A4  8D 4417           STA  CLKIT      ;....SECONDS FOR TIMER
01A7  A5 CC             LDA  GANG       ;FLIP OUTPUTBIT ....
01A9  49 80             EOR  #$80       ;.... BETWEEN 0 AND 1
01AB  8D 4217           STA  SBD        ;OUTPUTBIT
01AE  58                CLI             ;ENABLE INTERRUPTS
01AF  85 CC             STA  GANG       ;SAVE OUTPUTBIT
01B1  CA                DEX             ;ALL CYCLES SENT?
01B2  D0 E7             BNE  ZON1       ;NO.SEND MORE
01B4  68                PLA             ;RESTORE CHARACTER
```

```
C1B5  C6 CF             DEC   THIB    ;ONE LESSPHASE TO GO
C1B7  F0 C6             BEQ   SETZ    ;AND THIS ISPHASE 3
C1B9  30 07             BMI   ROUT    ;ALLPHASES DONE

C1BB  4A                LSR           ;GET BIT ....
C1BC  90 0A             BCC   ZON     ;.... IF IT IS '1' ....
C1BE  A9 FF     SET2    LDY   #$C0    ;.... CHANGE TO 2400 HZ
C1C0  F0 00             BEQ   ZON     ;FORCED BRANCH
C1C2  C6 CE     ROUT    DEC   COUNT   ;ONE LESSBIT TO GO
C1C4  DC CE             BNE   TRY
C1C6  60                RTS           ;ALL DONE
C200                    ORG   $0200   ;SUPERLOAD STARTS AT $0200
0200  AD F917   SUPERL  LDA   ID      ;STORE....
0203  85 C8             STA   DESID   ;....INTENDED ID
0205  AD F717           LDA   EAL     ;STORE BUFFER END ADDRESS
0208  85 C9             STA   EALB
020A  AD F817           LDA   EAM
020D  85 CA             STA   EAMB
020F  A9 00             LDA   #$00    ;INITIALIZE ....
0211  85 CB             STA   CFLG    ;.... LOAD ERROR FLAG
0213  8D F917           STA   ID      ;....AND ID FIELD
0216  A9 60             LDA   #$60    ;'RTS' OPCODE
0218  8D EC17           STA   VEB     ;RETURN OUT OF LOADT
021B  20 6C18           JSR   $186C   ;PUSH PATCH ADDRESS ONSTACK, GO TO LOADT
021E  8D F917   PATCH    STA   ID      ;HE GET HERE FROM $190C...JMP VEB
0221  C5 C8             CMP   DESID   ;INTENDED ID ?
0223  F0 0A             BEQ   PATCH2  ;YES
0225  A9 00             LDA   #$00    ;ANY ID ....
0227  C5 C8             CMP   DESID   ;.... OK?
0229  F0 04             BEQ   PATCH2  ;YES
022B  A9 80             LDA   #$80    ;SET ERROR FLAG ....
022D  85 CB             STA   CFLG    ; .... AND CONTINUE
022F  A9 8D     PATCH2  LDA   #$8D    ;'STA' OPCODE
0231  8D EC17           STA   VEB     ;RECREATE VEB STORE INST
0234  18                CLC           ;CLEAR CARRY FOR ENDING ADD COMP
0235  AD EE17           LDA   VEB+2   ;GET # OF BYTES - ....
0238  7D F517           ADC   SAL     ;.... ADD SAL ....
023B  8D F717           STA   EAL     ;.... TO GET EAL
023E  AD ED17           LDA   VEB+1   ;GET # OF BYTES + ....
0241  7D F617           ADC   SAM     ;.... ADD SAM ....
0244  8D F817           STA   EAM     ;.... TO GET EAM
0247  20 1219           JSR   INTVEB  ;CLEAR CHKSUM,SET UP VEB
024A  20 241A   PATCH1  JSR   RDCHT   ;GET NEXT BYTE (ACC HAS 7BIT ASCII) ....
024D  8D EA17           LDA   SAVX+1  ;.... SO GET THE FULL 8BIT BYTE
0250  20 4C19           JSR   CHKT    ;ADD TO CHECK SUM
0253  20 EC17           JSR   VEB     ;STORE IT
0256  20 EA19           JSR   INCVEB  ;INCREMENT VEB ADDRESS FOR STORE
0259  AD ED17           LDA   VEB+1   ;END ADDRESS?
025C  C5 C9             CMP   EALB    ;BUFFER END ?
025E  D0 02             BNE   PATCH3  ;NO
0260  F0 05             BEQ   PATCH4  ;MAYBE ?
0262  CD F717   PATCH3  CMP   EAL     ;RECORD END?
0265  D0 E3             BNE   PATCH1  ;NO, GET MORE BYTES
0267  AD EE17   PATCH4  LDA   VEB+2
026A  C5 CA             CMP   EAMB    ;BUFFER END ?
026C  D0 0F             BNE   PATCH5  ;NO
026E  CD F817           CMP   EAM     ;ALSO RECORD END ?
0271  D0 28             BNE   ERROR2  ;NO, ERROR EXIT
0273  AD ED17           LDA   VEB+1   ;LOW ORDER BYTE ALSO OK?
0276  CD F717           CMP   EAL
0279  D0 22             BNE   ERROR2  ;NO, ERROR EXIT
027B  F0 05             BEQ   PATCH6
027D  CD F817   PATCH5  CMP   EAM     ;RECORD END ?
0280  D0 CB             BNE   PATCH1  ;NO, CONTINUE
0282  20 241A   PATCH6  JSR   RDCHT   ;GET ENDING CHARACTER
0285  C9 2F             CMP   #$2F    ;'/'?
0287  D0 10             BNE   ERROR
0289  20 F319           JSR   RDBYT   ;GET CHECKSUM LO
028C  CD E717           CMP   CHKL    ;CHECKSUM OK?
028F  D0 C8             BNE   ERROR
0291  20 F319           JSR   RDBYT   ;GET CHECKSUM HI
0294  CD E817           CMP   CHKH    ;
0297  F0 04             BEQ   EXIT
0299  C6 CB     ERROR   DEC   CFLG    ;FE OR 7E = CHECKSUM ERROR
029B  C6 CB     ERROR2  DEC   CFLG    ;FF OR 7F = OVERRUN ERROR
                ; BOTH 7E OR 7F INDICATES IO ERROR
                EXIT    RTS           ;RETURN
```

KIMSI COMMENTS

From the response I've received concerning the KIM to S-100 bus adapter being offered by FORETHOUGHT PRODUCTS, I'd say there are a number of satisfied users. Nothing but words of praise for the product, so far. With S-100 memory running as low as $125 for 8K kits (BASE 2), the scheme seems like a reasonable method for system expansion. As far as assembled S-100 boards are concerned, the only ones that I am familiar with are the KENT-MOORE products. They market video and memory boards which seem to work as well as they look.

more

By the way, I've been informed that FORETHOUGH PRODUCTS have ...ared up any problems with their telephone service and are now accepting VISA (BankAmericard). Their phone number is (503) 485-8575. They indicate off-the-shelf delivery.

BASE 2 INC, PO Box 9941, Marina del Ray, Ca 90291 (213) 822-4499

KENT-MOORE INSTRUMENT CO., PO Box 507, Industrial Ave, Pioneer, Oh 43554 (419) 737-2352

FORETHOUGHT PRODUCTS, PO Box 386, Coburg, Or., 97401

****

RANDOM ACCESS CORNER

Here's a new feature of the NOTES for those who have special needs...

PEN PAL NEEDED - P. A. Ras, H. Gorterhof 138, DELFT, NETHERLANDS
Mr. Ras also needs info on Friden Flexowriter/KIM interfacing.

BURROUGHS TERMINAL/KIM-1 INTERFACE info needed by Gene Moore, 817 Windsor Rd Cumberland, Md.21502

BRINGING UP 8K CSI BASIC ON KIM1 or trying to bring it up?...get in touch with Donald Hill, 60 Evans Ave., East Hartford, Ct. 06118

FORTRAN II FOR THE 6502---"We're thinking about offering it depending on interest. Send SASE and info on what software you need to GENESEE MICROCOMPUTERS, 29 Genesee St., Pittard NY 14533"

GERMAN USER GROUP GETTING STARTED in the Frankfurt area. For more info, contact Erich Scheiber, Berliner St. 10, 6236 Eschborn, West Germany.

KIM-3 and/or KIM-4 desperately needed!!! contact JOHNSON COMPUTER (216) 725-4560

WASHINGTON AREA KIM ENTHUSIASTS who are interested in starting a KIM KLUB, send a S.A.S.E. or call!!! WAKE c/o Ted Beach, 5112 Williamsburg Blvd, Arlington, Va 22207 (703) 538-2303

MICRO-SOFTWARE SPECIALISTS INC., 1911 Meadow Lane, Arlington, Tx 76010 have announced that they have cleared up the problems with their assembler mentioned in our newsletter. They are accepting VISA at (817) 274-0291

WANTED: KIM-2 or KIM-3 RAM board for memory expansion. Contact Kenneth W. Enselle, 1337 Foster Rd., Napa Ca 94558 (707) 226-5014

FOR SALE: KIM-1 and experimintation accessories used in TERC microprocessor workshops. Valued at $500.00, will sell for $300.00. W. L. Sadler, 2020 Easy Street, Waukesha, Wi., 53186 (414) 547-9391

****

BOOK REVIEW SECTION from Charles A. Mills, 677 Lippincott Ave., Moorestown, N.J. 08057

UNIQUE PROGRAMMING BOOK *** HOW TO PROGRAM MICROCOMPUTERS by William Barden (SAMS $8.95) explains looping, stacks, list processing, bit manipulation, etc. The unique feature is that all program explanations are for the 8080, 6800, and 6502 so one can see how each is programmed to do the same thing. Twenty utility programs in each system are provided for comparison of coding requirements.

(I've seen this book and can also recommend it.....ERIC)

continued from pg. 15

Simpson, Richard S., "A Date with KIM"
Byte 1, No. 9, pp. 8-12 (May 1976)
Description of the features of KIM-1.

Microcomputer Associates, 111 Main St., Los Altos, CA 94022
"Jolt Microcomputer"
Radio-Electronics 47, No. 6, p. 66 (June 1976)
Includes description of JOLT, based on 6502, and gives demonstration program using DEMON Monitor.

Travis, T. E., "KIM-1 Microcomputer Module"
Microtrek, pp. 7-16 (August 1976)
Notes and programs for KIM-1 including Drunk test and several useful routines.

Anon., "MOS Technology - KIM MCS 6502"
Interface Age 1, No. 9, pp. 12, 14 (August 1976)
An announcement of the KIM-1.

Rankin, Roy and Worniak, Steve, "Floating Point Routines for the 6502"
Dr Dobbs Journal 1, No. 7, pp. 17-19 (August 1976)
Calculations from 10^{-38} to 10^{+38} with 7 significant digits.

Bradshaw, Jack, "Monitor for the 6502"
Dr Dobbs Journal 1, No. 7, pp. 20-21 (August 1976)
Monitor a la OSI.

Garetz, Mark, "Lunar Lander for the 6502"
Dr Dobbs Journal 1, No. 7, pp. 22-25 (August 1976)
A game requiring TIM Monitor and a terminal.

Gupta, Yogesh M., "True Confessions: How I Relate to KIM"
Byte 1, No. 12, pp. 44-48 (August 1976)
A series of notes on KIM-1. Includes Clock Stretch and Random Access Memories, Bus Expansion and modification of drive capability using tristate drivers, Interrupt Prioritizing Logic and Halt Instruction.

Thompson, Geo. L., "KIM on, Now"
Byte 1, No. 13, pp. 93-94 (September 1976)
Notes on using KIM-1.

Worniak, Steve, "Mastermind: A Number Game for the 6502"
DDJ 1, No. 8, pp. 26-27 (September 1976)
A number game adaptable to KIM-1 with terminal.

Baum, Allen and Worniak, Stephen, "A 6502 Dissembler"
Interface Age 1, No. 10, pp. 14-23 (September 1976)

Kjeldsen, Tony, "Next of KIM" (letter)
Byte 1, No. 14, p. 136 (October 1976)

Pittman, Tom, "Tiny Basic for 6502"
DDJ 1, No. 9, pp. 22-23 (October 1976)
Available from Itty Bitty Computers. TB650K (0200-0AFF) is for KIM and most homebrew 6502 systems with RAM in first 4K of memory.

Anon., "Build a Simple A to D"
Interface Age 1, No. 12, pp. 12-14 (November 1976)
Simple circuit, 6502 software, 16 locations. Use to interface a pot or a joystick.

Pollock, James W., "1000 WPM Morse Code Typer"
73 Mag. No. 196, pp. 100-103 (January 1977)
Use of KIM-1 for sending code at 9-1000 WPM from a keyboard.

Robbins, Carl M., "The Microprocessor and Repeater Control"
QST 61, No. 1, pp. 30-34 (January 1977)
KIM-1 control of repeater functions.

Cushman, Robert H., "Bare-bones Development Systems Make Good Learning Tools"
EDN 22, No. 6 (March 20, 1977)
See also 22, No. 8, pp. 104-111 (April 20, 1977)
22, No. 4, pp. 89-92 (February 20, 1977)
22, No. 10, pp. 84-90 (May 20, 1977)
22, No. 12, pp. 79-84 (June 20, 1977)
Use of KIM-1 in a music program is detailed in April 1977 issue.

Salter, Richard J. and Burham, Ralph W., "Navigation with Mini-O"
Byte 2, No. 4, pp. 100-109 (April 1977); See also Byte 2, No. 2, p. 62 (February 1977) and Byte 2, No. 3, p. 70 (March 1977).
Several articles in a series on the Omega Navigation System and the Mini-O Receiver driven by a KIM-1 processor. Developed at the Ohio University Avionics Engineering Center.

Haas, Bob, "KIM-1 Memory Expansion"
Kilobaud, No. 4, pp. 74-76 (April 1977)
Adding the S.D. Sales 4K Low Power RAM board to KIM-1.

Gordon, H. T., "Stringout Mods"
DDJ 2, No. 2, p. 8 (February 1977)
A 6502 program applicable to KIM-1 to relocate blocks of instructions in RAMs.

Sherman, Ralph, "A 650X Program Relocater"
DDJ 2, No. 4, pp. 30-31 (April 1977)

Ockers, Stan, "TV Sketch Program"
DDJ 2, No. 4, pp. 32-33 (April 1977)
A program for use with KIM-1 equipped with a Southwest Tech Prod Co. Graphics Board GT 6144.

Simpson, Rick, "Come Fly with KIM"
Byte 2, No. 6, pp. 76-80 (June 1977)
Load 12K of memory in two minutes with a "Fly Reader" for paper tape.

Lancaster, Don, "A TVT for your KIM"
Kilobaud, No. 6, pp. 50-63 (June 1977)
TVT-6L is a low cost method of providing a TV monitor for KIM-1. Uses minimum new hardware but depends on a software program in KIM-1 memory for handling characters. Uses a low cost TV (Pansonic T-126A) for monitor.

Lancaster, Don, "Build the TVT-6"
Popular Electronics 12, No. 1, pp. 47-52
A low cost direct video display based on KIM-1 software and a minimum of added hardware. Slightly different than the TVT-6L.

Pickles and Trout, P.O. Box 2270, Goleta, CA 93018 "TV Mod Kit"
Detailed instructions and kit of parts for conversion of a low cost ($80 approx.) Hitachi SX Chassis (Model P-04, P-08, PA-8, etc.) for a TV Monitor.

Grater, Robert, "Giving KIM Some Fancy Jewels"
Byte 2, No. 7, pp. 126-127 (July 1977)
Adding a remote LED display for the KIM-1.

Runyan, Grant, "The Great TV to CRT Monitor Conversion"
Kilobaud, No. 7, pp. 30-31 (July 1977)
Although not specific to KIM-1, this article is useful in adapting a monitor to KIM. Uses inexpensive 12" Hitachi Model P-04, P-08, PA-4, PA-8. See also Sams Photofact Folder 1 Set 1601 or Folder 3 Set 1501.

Fish, Larry, "Troubleshoot Your Software"
Kilobaud, No. 8, pp. 112-113 (August 1977)
A trace program for 6502.

more next time...